

FINITE-AMPLITUDE VIBRATION OF ORTHOTROPIC AXISYMMETRIC
VARIABLE THICKNESS ANNULAR PLATE

by

AURORA PREMKUMAR R.

B.E. (ME), University of Bombay (India), 1975

A MASTER'S THESIS

submitted in partial fulfillment of the

requirements for the degree

MASTER OF SCIENCE

Department of Mechanical Engineering

KANSAS STATE UNIVERSITY
Manhattan, Kansas

1978

Approved by:


Major Professor

Dedicated to my parents.

Document
LD
2668
.74
1978
A94
C.2

TABLE OF CONTENTS

	Page
LIST OF TABLES AND FIGURES	iii
NOMENCLATURE	iv
INTRODUCTION	1
CHAPTER I. DERIVATION OF THE GOVERNING EQUATION	3
CHAPTER II. APPROXIMATE ANALYSIS	15
Kantorovich Averaging Method	15
CHAPTER III. NUMERICAL ANALYSIS	20
Initial Value Method	20
CHAPTER IV. NUMERICAL COMPUTATIONS	29
CHAPTER V. CONCLUSIONS	35
References	36
APPENDIX A	39
APPENDIX B	49
ACKNOWLEDGEMENT	64

LIST OF TABLES

Table 1.	General Boundary Conditions	19
----------	---------------------------------------	----

LIST OF FIGURES

Figure

1	Parabolic Variable Thickness Annular Plate	40
2	Harmonic Responses of both the Plates	41
3	Normalized Frequency Responses	42
4	Shape Functions for Convex Variable Thickness Annular Plate	43
5	Shape Function for Parabolic Variable Thickness Annular Plate	44
6	Radial Bending Stresses for both the Plates	45
7	Circumferential Bending Stresses for both the Plates	46
8	Radial Membrane Stresses for both the Plates	47
9	Circumferential Membrane Stresses for both the Plates	48

NOMENCLATURE

r, θ, z	cylindrical coordinates used to describe the undeformed configuration of the plate.
$h(r), a$	thickness function and radius of plate.
h_0	thickness at center.
t	time variable.
u, w	radial and transverse displacement of the middle plane
$\epsilon_r, \epsilon_\theta$	radial and circumferential strains.
σ_r, σ_θ	radial and circumferential stresses.
a_{11}, a_{12}, a_{22}	stress-strain relation coefficients.
N_r, N_θ	middle plane forces per unit length.
M_r, M_θ	bending moments per unit length.
$Q(\xi), Q^*(\xi)$	dimensionless loading distributions.
$q(r, t)$	loading intensity.
K	kinetic energy of the plate.
V_s, V_b	strain energy due to stretching of the middle plane and due to bending of the plate respectively.
W	work done on the plate by the external forces.
ν	Poisson's ratio = $-a_{12}/a_{22}$
c	ratio of elastic constants = a_{11}/a_{22}
$D(r)$	flexural rigidity of the plate = $a_{22}h^3/12(a_{11}a_{22}-a_{12}^2)$
ψ, ϕ	stress functions
ξ, τ	dimensionless space and time variables respectively.
x	dimensionless transverse displacement
$g(\xi), f(\xi)$	shape functions of vibration.
A, α	amplitude parameters.

λ	nondimensional nonlinear eigenvalue.
$\omega = (\lambda)^{1/2}$	nondimensional angular frequency.
$\bar{Y}, \bar{Z}, \bar{H}$	(6x1) vector functions
M, N	coefficient matrices.
\bar{O}	(3x1) null matrix
'r, 't	partial derivatives with respect to r & t
$\eta(\xi)$	variable thickness function.
τ	frequency parameter.
$\delta\chi$	first variation of $\chi = \delta G \sin \omega \tau$
$\bar{\eta}$	adjustable data in the related initial value problem.
{ }	indicates a column vector.
Δ	Del operator.

INTRODUCTION

Composite materials find large application in design of structural elements in the present age. These structures which are mainly in the form of plates, are subjected to severe operational conditions, and should thus be able to withstand large amplitudes of vibration. If the amplitude of vibration is of the same order of magnitude as the thickness of the plate, then the deformation of the mid-plane can no longer be neglected. In the development of a suitable thin plate theory, anisotropic properties and geometric non-linearities arising in the coupling of membrane and bending theories should be included. The resulting governing differential equations can be solved by approximate numerical methods due to the complexity of the problem.

In 1960, Kazimierz Borsuk, determined a method to solve in an accurate manner the problem of free vibration of circular cylindrically orthotropic plates. In 1969 A. P. Salzman and S. A. Patel used the method of separation of variables along with Frobenius' method to determine the frequencies of clamped or simply supported solid circular variable thickness orthotropic plates. In 1971, K. Vijayakumar and C. V. Joga Rao determined the axisymmetric vibration and buckling of polar orthotropic circular plates. In 1973 C. L. Huang and H. K. Woo used the Ritz-Kantorovich method to determine large oscillations of orthotropic annular plates. In 1974, G. K. Ramiah and K. Vijayakumar, determined the vibration of polar orthotropic annular plates.

The above and many other investigators (18-30) have worked on either solid, circular, variable thickness, anisotropic plates or annular orthotropic plates. This present investigation is thus concerned with harmonic, large

amplitude, free vibrations of orthotropic, axisymmetric, annular plates of variable thickness.

The essence of the approximate method is to approximate the continuous system by a discrete one having a finite number of degrees of freedom. The discrete representation is achieved through an assumed space mode. Substitution of this in the differential equations along with the requirement that some measure of the error be minimized, the assumed space mode can be eliminated. The problem thus reduces to a nonlinear ordinary differential equation with time as an independent variable. This equation is similar to a one-degree of freedom Duffings equation (5).

This present work assumes the existence of harmonic vibrations. The time variable is eliminated by the application of a Ritz-Kantorovich averaging method. The basic governing equations thus reduce to a pair of ordinary differential equations, with a reformulated set of boundary conditions. A numerical study of these equations is proposed by introducing the related initial value problem.

The cases considered are, a parabolic variable thickness annular plate, with the variable thickness function of the form

$$\eta = 0.815 - 0.5 x^2$$

and a convex variable thickness annular plate, with the variable thickness function of the form

$$\eta = 1.0 - 0.5 x^{1/2} .$$

Both the above plates have the same volume and the same boundary conditions. The boundary conditions are free on the outside and fixed on the inside. The corresponding curves for the frequency responses, bending stresses, and membrane stresses are presented.

CHAPTER I

DERIVATION OF THE GOVERNING EQUATIONS

Consider a thin annular orthotropic plate, the elastic properties of which are different in the radial and circumferential directions. The fundamental assumptions made as regards to the flexural deformations of the plate are:

1. The loads and deflections are symmetric with respect to the z axis which passes through the center of the annulus.
2. The normals to the middle plane in the undeformed plate remain straight and normal to the middle plane in the deformed plate.
3. It follows the Hooke's Law.
4. Transverse shearing deformations are not included.
5. The maximum thickness of the plate is small in comparison to the radius of the plate.

Keeping in mind the above assumptions, the following strain-displacement relations are written:

$$\epsilon_r = \frac{\partial u}{\partial r} + \frac{1}{2} \left(\frac{\partial w}{\partial r} \right)^2 - z \frac{\partial^2 w}{\partial r^2}$$

or in indicial notation as:

$$\epsilon_r = u_{,r} + \frac{1}{2} w_{,r}^2 - z w_{,rr} \quad (1)$$

In the θ direction:

$$\epsilon_\theta = \frac{u}{r} - \frac{z}{r} \frac{\partial w}{\partial r}$$

or in indicial notation as:

$$\epsilon_\theta = \frac{u}{r} - \frac{z}{r} w_{,r} \quad (2)$$

In view of the orthotropy of the plate considered, the Hooke's Law can be written as:

$$\epsilon_{\theta} = a_{11}\sigma_{\theta} + a_{12}\sigma_r \quad (3a)$$

$$\epsilon_r = a_{12}\sigma_{\theta} + a_{22}\sigma_r \quad (3b)$$

From the above two equations, it follows

$$\sigma_r = \frac{a_{11}}{a_{11}a_{22} - a_{12}^2} \left(\epsilon_r - \frac{a_{12}}{a_{11}} \epsilon_{\theta} \right) \quad (4a)$$

$$\sigma_{\theta} = \frac{a_{22}}{a_{11}a_{22} - a_{12}^2} \left(\epsilon_{\theta} - \frac{a_{12}}{a_{22}} \epsilon_r \right) \quad (4b)$$

where a_{11} , a_{22} , a_{12} are the elastic constants and σ_r , σ_{θ} are the radial and circumferential stresses.

Resubstituting ϵ_{θ} and ϵ_r from (1) and (2), we have

$$\sigma_r = \frac{a_{11}}{a_{11}a_{22} - a_{12}^2} \left(u_{,r} + \frac{1}{2} w_{,r}^2 - \frac{a_{12}}{a_{11}} \left(\frac{u}{r} - \frac{z}{r} w_{,r}^2 \right) \right) \quad (5a)$$

$$\sigma_{\theta} = \frac{a_{22}}{a_{11}a_{22} - a_{12}^2} \left(\frac{u}{r} - \frac{a_{12}}{a_{22}} \left(u_{,r} + \frac{1}{2} w_{,r}^2 - z \frac{\partial^2 w}{\partial r^2} \right) - \frac{z}{r} \frac{\partial w}{\partial r} \right) \quad (5b)$$

Expressions for the radial and circumferential forces per unit length, N_r and N_{θ} , are obtained by integrating the respective stresses across the thickness of the plate.

$$N_{\theta} = \int_{-h/2}^{h/2} \sigma_{\theta} dz = \frac{a_{22}h(r)}{a_{11}a_{22} - a_{12}^2} \left(\frac{u}{r} - \frac{a_{12}}{a_{22}} \left(\frac{\partial u}{\partial r} + \frac{1}{2} \left(\frac{\partial w}{\partial r} \right)^2 \right) \right) \quad (6a)$$

$$N_r = \int_{-h/2}^{h/2} \sigma_r dz = \frac{a_{11}h(r)}{a_{11}a_{22} - a_{12}^2} \left(\frac{\partial u}{\partial r} + \frac{1}{2} \left(\frac{\partial w}{\partial r} \right)^2 - \frac{a_{12}}{a_{11}} \left(\frac{u}{r} \right) \right) \quad (6b)$$

or,

$$N_r = \frac{h(r)}{a_{22}(c-v^2)} \left(c(u, r + \frac{1}{2} w, r^2) + \frac{vu}{r} \right) \quad (7a)$$

$$N_\theta = \frac{h(r)}{a_{22}(c-v^2)} \left(\frac{u}{r} + vu, r + \frac{v}{2} (w, r)^2 \right) \quad (7b)$$

where,

$c = \frac{a_{11}}{a_{22}}$ = ratio of properties in radial and circumferential directions.

$v = -\frac{a_{12}}{a_{22}}$ = poisson's ratio.

The radial and circumferential moments per unit length, M_r and M_θ , are obtained by integrating the moments of the forces about the middle plane across the thickness of the plate.

$$M_r = \int_{-h/2}^{h/2} \sigma_r z dz = \frac{a_{11}}{a_{11}a_{22} - a_{12}^2} \int_{-h/2}^{h/2} \left(\epsilon_r - \frac{a_{12}}{a_{11}} \epsilon_\theta \right) z dz \quad (8a)$$

$$M_\theta = \int_{-h/2}^{h/2} \sigma_\theta z dz = \frac{a_{22}}{a_{11}a_{22} - a_{12}^2} \int_{-h/2}^{h/2} \left(\epsilon_\theta - \frac{a_{12}}{a_{22}} \epsilon_r \right) z dz \quad (8b)$$

or,

$$M_r = -D \left(\frac{v}{r} w, r + c w, rr \right) \quad (9a)$$

$$M_\theta = -D \left(\frac{1}{r} w, r + v w, rr \right) \quad (9b)$$

where,

$$D = \frac{a_{22}h^3}{12(a_{11}a_{22} - a_{12}^2)} = \frac{E_\theta h^3}{12} = \frac{h^3}{12g}$$

$$g = \frac{a_{11}a_{22} - a_{12}^2}{a_{22}}$$

The Energy Method

The extended Hamilton's Principle, which states that, within the interval of time, t_1 and t_2 , the first variation of the action integral is equal to zero, is made use of here; i.e.;

$$\delta \int_{t_1}^{t_2} L dt = 0 \quad (10)$$

$$\text{Here the Lagrangian is } L = K - V_s - V_b + W \quad (11)$$

where

K = Kinetic Energy

V_s = strain energy due to stretching of the middle plane

V_b = strain energy due to the bending of the plate.

W = work done by the time dependent external forces.

1. Neglecting the radial part of inertia force, $\partial u / \partial t \ll \partial w / \partial t$, the kinetic energy is

$$K = \pi \int_c^a \rho h(r) w_t^2 r dr \quad (12)$$

2. The strain energy due to stretching of the middle plane is obtained as follows:

$$V_s = 2\pi \int_c^a \left\{ \frac{N_r \bar{\epsilon}_r}{2} + \frac{N_\theta \bar{\epsilon}_\theta}{2} \right\} r dr \quad (13)$$

Substituting values of N_r , N_θ , ϵ_r , ϵ_θ and rearranging,

$$V_s = \frac{\pi}{8} \int_c^a \left\{ cu_r^2 + \frac{c}{4} w_r^4 + cu_r w_r^2 + 2v \frac{u}{r} u_r + v \frac{u}{r} w_r^2 + \left(\frac{u}{r} \right)^2 \right\} h r dr \quad (14)$$

3. The strain energy due to bending of the plate:

$$V_b = -\pi \int_c^a \left\{ M_r \frac{\partial^2 w}{\partial r^2} + M_\theta \frac{1}{r} \frac{\partial w}{\partial r} \right\} r dr$$

Substituting M_r and M_θ and rearranging,

$$V_b = \pi \int_c^a D(r) \left\{ c w_{rr}^2 + 2 \frac{v}{r} w_r w_{rr} + \frac{1}{r^2} w_r^2 \right\} r dr \quad (15)$$

4. The work done by the exciting force function $p(r, t)$,

$$W = -2\pi \int_c^a p(r, t) w r dr \quad (16)$$

Substituting equations (12), (14), (15) and (16) into (11) we obtain the Lagrangian as:

$$\begin{aligned} L = & \pi \int_c^a \rho h(r) w_t^2 r dr \\ & - \frac{\pi}{\beta} \int_c^a \left\{ c u_r^2 + c u_r w_r^2 + \frac{c}{4} w_r^4 + 2 \frac{u}{r} u_r + \frac{u}{r} w_r^2 + \left(\frac{u}{r} \right)^2 \right\} h r dr \\ & - \frac{\pi}{12\beta} \int_c^a \left\{ c w_{rr}^2 + 2 \frac{v}{r} w_r w_{rr} + \left(\frac{w_r}{r} \right)^2 \right\} h^3 r dr \\ & + 2\pi \int_c^a p(r, t) w r dr \end{aligned} \quad (17)$$

Now the integral can be written symbolically as:

$$I = \int_{t_1}^{t_2} \pi \int_c^a f(t, r; w, u, w_r, u_r, w_t, w_{rr}) r dr dt$$

where,

$$\begin{aligned} f = & \{ \rho h r w_t^2 - \frac{h}{\beta} [c r u_r^2 + \frac{c}{4} r w_r^4 + c u_r w_r^2 + 2 v u u_r + v u w_r^2 + \frac{u^2}{r}] \\ & - \frac{h^3}{12\beta} [c r w_{rr}^2 + 2 v w_r w_{rr} + \frac{1}{r} w_r^2] + 2 p(r, t) r w \} \end{aligned}$$

The first variation of I vanishes

$$\delta I = \int_{t_1}^{t_2} \int_c^a \left\{ \left(\frac{\partial f}{\partial w} \right) \delta w + \left(\frac{\partial f}{\partial u} \right) \delta u + \left(\frac{\partial f}{\partial w_r} \right) \delta w_r + \left(\frac{\partial f}{\partial u_r} \right) \delta u_r + \left(\frac{\partial f}{\partial w_t} \right) \delta w_t + \left(\frac{\partial f}{\partial w_{rr}} \right) \delta w_{rr} \right\} dr dt \quad (18)$$

Now,

$$\int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial w} \right) \delta w dr dt = \int_{t_1}^{t_2} \int_c^a (2pr) \delta w dr dt \quad (19)$$

$$\int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial u} \right) \delta u dr dt = \int_{t_1}^{t_2} \int_c^a -\frac{h}{\beta} (2v u_r + v w_r^2 + \frac{2u}{r}) \delta u dr dt \quad (20)$$

$$\int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial w_r} \right) \delta w_r dr dt = \int_{t_1}^{t_2} \frac{\partial f}{\partial w_r} \delta w \Big|_c^a dt - \int_{t_1}^{t_2} \int_c^a \frac{d}{dr} \left(\frac{\partial f}{\partial w_r} \right) \delta w dr dt \quad (21a)$$

by partial integration.

Substituting values of $\frac{d}{dr} \left(\frac{\partial f}{\partial w_r} \right)$ and $\frac{\partial f}{\partial w_r}$ into equation (21a) we obtain:

$$\begin{aligned} \int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial w_r} \right) \delta w_r dr dt &= \int_{t_1}^{t_2} -\frac{h}{\beta} \{ c r w_r^3 + 2 c u_r r w_r + 2 v u w_r \} \\ &\quad - D(r) \left\{ 2 v w_{rr} + \frac{2 w_r}{r} \right\} \delta w \Big|_c^a dt \\ &\quad - \int_{t_1}^{t_2} \int_c^a \left\{ -\frac{h}{\beta} [3 c r w_r^2 w_{rr} + c w_r^3 + 2 c u_r w_r \right. \\ &\quad \left. + 2 v u w_{rr} + 2 c u_r r w_{rr} + 2 c u_{rr} v w_r + \right. \end{aligned}$$

$$\begin{aligned}
& + 2v u_r w_r] - D_r [2v w_{rr} + \frac{2w_r}{r}] \\
& - \frac{h_r}{\beta} [c r w_r^3 + 2c u_r w_r + 2v u w_r] \\
& - D(r) [2v w_{rrr} + \frac{2w_{rr}}{r} - \frac{2w_r}{2}] \} \delta w dr dt \quad (21)
\end{aligned}$$

By similar method, substituting values of $\frac{d}{dr} \left(\frac{\partial f}{\partial u_r} \right)$ and $\frac{\partial f}{\partial u_r}$ in equation:

$$\int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial u_r} \right) \delta u_r dr dt = \int_{t_1}^{t_2} \frac{\partial f}{\partial u_r} \delta u \Big|_c^a dt - \int_{t_1}^{t_2} \int_c^a \frac{d}{dr} \left(\frac{\partial f}{\partial u_r} \right) \delta u dr dt$$

We get,

$$\begin{aligned}
\int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial u_r} \right) \delta u_r dr dt &= \int_{t_1}^{t_2} - \frac{h}{\beta} [2c r u_r + c r w_r^2 + 2v u] \delta u \Big|_c^a dt \\
&- \int_{t_1}^{t_2} \int_c^a \left\{ - \frac{h}{\beta} [2c u_r + 2c r u_{rr} + c w_r^2 + 2c r w_r w_{rr} \right. \\
&\left. + 2v u_r] - \frac{h_r}{\beta} [2c r u_r + c r w_r^2 + 2v u] \right\} \delta u dr dt \quad (22)
\end{aligned}$$

Substituting values of $\frac{\partial f}{\partial w_t}$ and $\frac{d}{dt} \left(\frac{\partial f}{\partial w_t} \right)$ in equation:

$$\int_{t_1}^{t_2} \int_c^a \frac{\partial f}{\partial w_t} \delta w_t dr dt = \int_c^a \frac{\partial f}{\partial w_t} \delta w \Big|_{t_1}^{t_2} dr - \int_{t_1}^{t_2} \int_c^a \left\{ \frac{d}{dt} \left(\frac{\partial f}{\partial w_t} \right) \right\} \delta w dr dt$$

And as, $\delta w = 0$ at t_1, t_2 , the first integral = 0, hence the above equation reduces to:

$$\int_{t_1}^{t_2} \int_c^a \frac{\partial f}{\partial w_t} \delta w_t dr dt = - \int_{t_1}^{t_2} \int_c^a (2\rho h_r w_{tt}) \delta w dr dt \quad (23)$$

And finally we have,

$$\begin{aligned} \int_{t_1}^{t_2} \int_c^a \left(\frac{\partial f}{\partial w_{rr}} \right) \delta w_{rr} \, dr dt &= \int_{t_1}^{t_2} \frac{\partial f}{\partial w_{rr}} \delta w_r \Big|_c^a \, dt \\ &\quad - \int_{t_1}^{t_2} \frac{d}{dr} \left(\frac{\partial f}{\partial w_{rr}} \right) \delta w \Big|_c^a + \int_{t_1}^{t_2} \int_c^a \frac{d^2}{dr^2} \left(\frac{\partial f}{\partial w_{rr}} \right) \delta w_{rr} \, dr dt \end{aligned}$$

after integrating by parts twice, and substituting the values of the various constituents of the equation we have,

$$\begin{aligned} \int_{t_1}^{t_2} \int_c^a \frac{\partial f}{\partial w_{rr}} \delta w_{rr} \, dr dt &= \int_{t_1}^{t_2} -D(r) [2cw_{rr} + 2vw_r] \delta w_r \Big|_c^a \, dt \\ &\quad - \int_{t_1}^{t_2} \left\{ -D(r) [2cw_{rr} + 2cr w_{rrr} + 2vw_{rr} \right. \\ &\quad \left. - D_r [2cr w_{rr} + 2vw_r] \right\} \delta w \Big|_c^a \, dt \\ &\quad + \int_{t_1}^{t_2} \int_c^a \left\{ -D(r) [4cw_{rrr} + 2crw_{rrrr} + 2vw_{rrr}] \right. \\ &\quad \left. - D_r [4crw_{rrr} + 4cw_{rr} + 4vw_{rr}] \right. \\ &\quad \left. - D_{rr} [2crw_{rr} + 2vw_r] \right\} \delta w_{rr} \, dr dt \end{aligned} \quad (24)$$

Substituting equations (19) to (24) into (18) we get:

$$\begin{aligned} \delta I &= \int_{t_1}^{t_2} \int_c^a 2pr \delta w_{rr} \, dr dt + \int_{t_1}^{t_2} \int_c^a -\frac{h}{\beta} (2vu_r + vw_r^2 + \frac{2u}{r}) \delta w_{rr} \, dr dt \\ &\quad + \int_{t_1}^{t_2} \left[-\frac{h}{\beta} (crw_r^3 + 2cu_r w_r + 2vw_{rr}) - D(r) (2vw_{rr} + \frac{2w_r}{r}) \right] \delta w \Big|_c^a \, dt \end{aligned}$$

$$\begin{aligned}
& - \int_{t_1}^{t_2} \int_c^a \left\{ -\frac{h}{\beta} [3crw_{rr}^2 + cw_r^3 + 2cu_{rr}w_r + 2cu_rw_{rr}] \right. \\
& + 2cu_rw_r + 2vu_{rr} + 2vu_rw_r \left. \right\} - \frac{h}{\beta} [crw_r^3 + 2cu_rw_{rr} \\
& + 2vu_rw_r] - D(r) [2vw_{rrr} + \frac{2w_{rr}}{r} - \frac{2}{r^2} w_r] - D_r(r) [2vw_{rr} + \frac{2}{r} w_r] \left. \right\} \delta w dr dt \\
& + \int_{t_1}^{t_2} \left\{ \frac{h}{\beta} [2cru_r + crw_r^2 + 2vu] \right\} \delta u \Big|_c^a dt \\
& - \int_{t_1}^{t_2} \int_c^a \left\{ -\frac{h}{\beta} [2cu_r + 2cru_{rr} + cw_r^2 + 2crw_{rr}w_{rr} + 2vu_r] \right. \\
& \quad \left. - \frac{h}{\beta} [2cru_r + crw_r^2 + 2vu] \right\} \delta u dr dt \\
& + \int_{t_1}^{t_2} \left\{ -D(r) [2cw_{rr} + 2vw_r] \right\} \delta w_r \Big|_c^a dt \\
& - \int_{t_1}^{t_2} \left\{ -D(r) [2cw_{rr} + 2crw_{rrr} + 2vw_{rr}] - D_r(r) [wcrw_{rr} + 2vw_r] \right\} \\
& - \delta w \Big|_c^a dt + \int_{t_1}^{t_2} \int_c^a \left\{ -D(r) [4cw_{rrr} + 2crw_{rrrr} + 2vw_{rrr}] \right. \\
& - D_r(r) [4crw_{rr} + 4vw_{rr} + 4cw_{rr}] - D_{rr}(r) [2crw_{rr} + 2vw_r] \left. \right\} \delta w dr dt \\
& - \int_{t_1}^{t_2} \int_c^a (2\rho h r w_{tt}) \delta w dr dt = 0 \tag{25}
\end{aligned}$$

For equation (25) to hold true, the integrands in the double and single integrals should vanish separately.

The double integral yields the Euler-Lagrange equations:

$$\begin{aligned}
 D(r) \left[c w_{rrrr} + \frac{2c}{r} w_{rrr} - \frac{w_{rr}}{r^2} + \frac{w_r}{r^3} \right] + D_r \left[2c w_{rrr} + \frac{2c}{r} w_{rr} + \frac{v}{r} w_{rr} - \frac{w_r}{r^2} \right] \\
 + D_{rr} \left[c w_{rr} + \frac{v w_r}{r} \right] + \rho h(r) w_{tt} = p(r, t) + \frac{1}{\beta} \left\{ h \left[c (u_r w_{rr} + u_{rr} w_r) \right. \right. \\
 \left. \left. + \frac{u_r w_r}{r} + \frac{3}{2} w_r^2 w_{rr} + \frac{w_r^3}{2r} \right] + \frac{v}{r} (u w_{rr} + u_r w_r) \right\} + h_r \left(c u_r w_r + \frac{c}{2} w_r^3 + \frac{v}{r} u w_r \right) \}
 \end{aligned} \quad (26)$$

and

$$\begin{aligned}
 h \left\{ c u_{rr} + \frac{c u_r}{r} - \frac{u}{r^2} + (c-v) \frac{w_r^2}{2r} + c w_r w_{rr} \right\} \\
 + h_r \left\{ c u_r + \frac{c}{2} w_r^2 + \frac{v u}{r} \right\} = 0
 \end{aligned} \quad (27)$$

The single integrals yield, the boundary conditions,

$$\begin{aligned}
 w=0 \quad \text{or} \quad -\frac{h}{\beta} w_r \left(\frac{c}{2} w_r^2 + c u_r + \frac{v}{r} \right) + D(r) \left(-\frac{w_r}{r^2} + c w_{rrr} + \frac{c w_{rr}}{r} \right) \\
 + D_r (c w_{rr} + \frac{v}{r} w_r) = 0 \rightarrow \text{shear} = 0
 \end{aligned}$$

deflection = 0

$$w_r = 0 \quad \text{or} \quad D(r) (2c w_{rr} + 2v w_r) = 0 \rightarrow \text{Moment} = 0$$

slope = 0

and

$$u = 0 \quad \text{or} \quad r h(r) \left(c u_r + \frac{c w_r^2}{2} + \frac{u}{r} \right) = 0 \rightarrow \text{Force} = 0$$

Equation (26) can be expressed as:

$$\begin{aligned}
& D(cw_{rrrr} + \frac{2c}{r} w_{rrr} - \frac{1}{r^2} w_{rr} + \frac{1}{r^3} w_r) + D_r(2cw_{rrr} + (2c+v) \frac{1}{r} w_{rr} - \frac{1}{r^2} w_r) \\
& + D_{rr}(cw_{rr} + \frac{v}{r} w_r) + \rho h w_{tt} = p(r, t) + \frac{1}{\beta} \frac{1}{r} \frac{\partial}{\partial r} [hrw_r(cu_r + \frac{c}{2} w_r^2 + \frac{v}{r} u)]
\end{aligned} \quad (28)$$

Proceeding further with the stress formulation, and substituting the following into equations (27) & (28)

$$\Psi = rN_r \quad \text{and} \quad \frac{\partial \Psi}{\partial r} = N_\theta$$

$$\frac{\partial u}{\partial r} + \frac{1}{r} w_r^2 = \frac{a_{22}}{h} (N_r - vN_\theta) = \frac{a_{22}}{h} (\frac{\Psi}{r} - v\Psi_r)$$

$$\frac{u}{r} = \frac{a_{22}}{h} (c\Psi_r - \frac{v}{r} \Psi)$$

We have the following equation:

$$\begin{aligned}
& D(cw_{rrrr} + \frac{2c}{r} w_{rrr} - \frac{1}{r^2} w_{rr} + \frac{1}{r^3} w_r) + D_r(2cw_{rrr} + (2c+v) \frac{1}{r} w_{rr} - \frac{1}{r^2} w_r) \\
& + D_{rr}(cw_{rr} + \frac{v}{r} w_r) + \rho h w_{tt} = p(r, t) + \frac{1}{r} [w_r \Psi]_r
\end{aligned} \quad (29)$$

$$[c\Psi_{rr} + \frac{c\Psi_r}{r} - \frac{\Psi}{r^2}] + \frac{h_r}{h} [-c\Psi_r + \frac{v\Psi}{r}] + \frac{h}{2a_{22}r} w_r^2 = 0 \quad (30)$$

and the boundary conditions become:

$$w = 0 \quad \text{or} \quad D[cw_{rrr} + \frac{c}{r} w_{rr} - \frac{w_r}{r^2}] + D_r[cw_{rr} + \frac{v}{r} w_r] - \frac{1}{r} w_r \Psi = 0$$

$$w_r = 0 \quad \text{or} \quad cw_{rr} + \frac{v}{r} w_r = 0$$

$$\Psi = 0 \quad \text{or} \quad c\Psi_r - v \frac{\Psi}{r} = 0$$

Using the substitutions,

$$\chi = \frac{w}{a}$$

$$\xi = \frac{r}{a}$$

$$\tau = t \left[\frac{D_0}{h a^4 (1-v^2)} \right]^{1/2}$$

$$\phi = \frac{a_{22}}{h_0 a} \psi$$

$$D = \frac{h^3}{12\beta} \quad ; \quad \beta = a_{22}(c-v^2) = \frac{h_0^3 \eta^3}{12(c-v^2)a_{22}}$$

$$D_0 = \frac{h_0^3}{12a_{22}}$$

we get the following non-dimensional form:

$$\begin{aligned} & \eta^3 [c\chi'''' + \frac{2c}{\xi} \chi''' - \frac{1}{\xi^2} \chi'' + \frac{1}{\xi^3} \chi'] + (\eta^3)_{\xi} [2c\chi''' + (2c+v) \frac{1}{\xi} \chi' \\ & - \frac{1}{\xi^2} \chi'] + (\eta^3)_{\xi\xi} [c\chi'' + \frac{v}{\xi} \chi'] + \eta \left(\frac{c-v^2}{1-v^2} \right) \chi_{\tau\tau} \\ & = 12(c-v^2)a_{22} \left(\frac{a}{h_0} \right)^3 p + 12(c-v^2) \left(\frac{a}{h_0} \right)^2 \frac{1}{\xi} [\chi'\phi]' \end{aligned} \quad (31)$$

$$\text{and,} \quad [c\phi'' + \frac{c\phi'}{\xi} - \frac{\phi}{\xi^2}] + \frac{\eta_{\tau}}{\eta} [-c\phi' + v \frac{\phi}{\xi}] + \frac{\eta}{2\xi} [\chi_{\xi}]^2 \quad (32)$$

The boundary conditions become,

$$\chi' = 0 \quad \text{or} \quad c\chi'' + \frac{v}{\xi} \chi' = 0 \quad (33a)$$

$$\begin{aligned} \chi = 0 \quad \text{or} \quad [c\chi''' + \frac{c}{\xi} \chi'' - \frac{1}{\xi^2} \chi'] + \frac{3\eta'}{\eta} [c\chi'' + \frac{v}{\xi} \chi'] \\ - 12(c-v^2) \left(\frac{a}{h_0} \right)^2 \frac{1}{\eta\xi} (\chi'\phi) = 0 \end{aligned} \quad (33b)$$

$$\phi = 0 \quad \text{or} \quad c\phi' - \frac{v}{\xi} \phi = 0 \quad (33c)$$

CHAPTER II

APPROXIMATE ANALYSIS

There is, at present, no exact method known, for the solution of the differential equations (31) and (32), also the standard fourier analysis used in linear vibration problems is not applicable, because the nonlinear character of the differential equation, causes coupling of vibration modes.

Consequently, this nonlinear coupled problem, can only be solved by some approximate numerical method. Approximate solutions of large amplitude vibrations can be achieved by separation of variables method, or implementing function space methods to eliminate the space coordinate with an assumed mode shape function. The problem is thus reduced to a non-linear ordinary differential equations with time t , as an independent variable. The resulting one degree of freedom Duffings equation is solved and the solutions are in terms of elliptical functions. This is called the assumed - space - mode solution. The Kantorovich Averaging method is proposed to find an assumed time-mode solution of the equations (31) and (32) and the boundary conditions equations (33).

Kantorovich Averaging Method:

A sinusoidal form of the loading intensity is assumed here:

$$P(\xi, \tau) = Q(\xi) \sin \omega \tau \quad (34)$$

also, the steady state response can be closely approximated by the expressions,

$$X(\xi, \tau) = G(\xi) \sin \omega \tau \quad (35a)$$

$$\phi(\xi, \tau) = F(\xi) \sin^2 \omega \tau \quad (35b)$$

where $G(\xi)$ and $F(\xi)$ are the undetermined shape functions of vibrations.

Substituting equations (35) into equation (32), we have

$$c \frac{d^2 F}{d\xi^2} + \frac{c}{\xi} \frac{dF}{d\xi} - \frac{F}{\xi^2} + \frac{h}{2\xi} (G')^2 + \frac{\eta_r}{\eta} \left[-c \frac{dF}{d\xi} + v \frac{F}{\xi} \right] = 0 \quad (36)$$

As the expressions (34) and (35) cannot satisfy equations (31) for all τ , the integral,

$$\begin{aligned} I_A = \int_R \left\{ \eta^3 \left[cX'''' + \frac{2c}{\xi} X''' - \frac{1}{\xi^2} X'' + \frac{1}{\xi^3} X' \right] \right. \\ + (\eta^3)_{\xi} \left[2cX''' + \frac{(2c+v)}{\xi} X'' - \frac{1}{\xi^2} X' \right] \\ + (\eta^3)_{\xi\xi} \left[cX'' + \frac{v}{\xi} X' \right] + \eta \left[\frac{c-v^2}{1-v^2} \right] X_{\tau\tau} \\ \left. - (c-v^2)P - 12(c-v^2) \left(\frac{a}{h_0} \right)^2 \frac{1}{\xi} (X'\phi)' \right\} \delta X_{\xi} d\xi \end{aligned} \quad (37)$$

where $P = 12a_{22} \left(\frac{a}{h} \right)^3 P$,

is used to obtain a governing equation which closely resembles equation (31), within the limits of assumed form of motion and loading as given in equations (34) and (35).

Substituting expressions (34) and (35) into (37) and equating the average virtual work over a period of oscillation to zero, or explicitly:

$$I' = \int_0^{2\pi/\omega} I_A d\tau = 0$$

yields:

$$\begin{aligned} \eta^3 \left[cG'''' + \frac{2c}{\xi} G''' - \frac{1}{\xi^2} G'' + \frac{1}{\xi^3} G' \right] + (\eta^3)_{\xi} \left[2cG''' + \frac{(2c+v)}{\xi} G'' \right. \\ \left. - \frac{1}{\xi^2} G' \right] + (\eta^3)_{\xi\xi} \left[cG'' + \frac{v}{\xi} G' \right] - \omega^2 \eta \frac{(c-v^2)}{(1-v^2)} G \\ - 9 (c-v^2) \left(\frac{a}{h_0} \right)^2 \frac{1}{\xi} [G' F]' = (c-v^2) Q \end{aligned} \quad (38)$$

The problem therefore becomes governed by a pair of nonlinear coupled ordinary differential equations (36) and (38). For convenience in conducting a parametric study, let

$$G(\xi) = A g(\xi) \quad (39a)$$

$$F(\xi) = A^2 f(\xi) \quad (39b)$$

where A is amplitude parameter, and $g(\xi)$ and $f(\xi)$ are shape functions.

Substituting these into equations (35) and (38) we get,

$$c \frac{d^2 f}{d\xi^2} + c(1 - \frac{\eta'}{\eta} \xi) \frac{f'}{\xi} - (1 - \frac{\nu'}{\eta} \nu \xi) \frac{f}{\xi^2} + \frac{\eta}{2\xi} (g')^2 = 0 \quad (40a)$$

$$\begin{aligned} c\eta^3 g'''' + (\frac{2c}{\xi} \eta^3 + 6c\eta' \eta^2) g''' + (-\frac{\eta^3}{\xi^2} + \frac{3(2c+\nu)\eta' \eta^2}{\xi} \\ + 3c\eta'' \eta^2 + 6c\eta(\eta')^2) g'' \\ + (\frac{1}{\xi^3} \eta^3 - 3\eta' \eta^2 \frac{1}{\xi^2} + (3\eta'' \eta^2 + 6\eta(\eta')^2) \frac{\nu}{\xi}) g' - \eta\lambda \frac{(c-\nu^2)}{(1-\nu^2)} g \\ - 9(c-\nu^2)\alpha \frac{1}{\xi} (g' f') = (c-\nu^2) \frac{Q^*}{\sqrt{\alpha}} \end{aligned} \quad (40b)$$

This can be expressed as:

$$\begin{aligned} A_1 g'''' + A_2 g''' + A_3 g'' + A_4 g' - \eta\lambda \frac{(c-\nu^2)}{(1-\nu^2)} g - \frac{9(c-\nu^2)}{\xi} \alpha (g' f') \\ = \frac{(c-\nu^2)}{\sqrt{\alpha}} Q^* \end{aligned} \quad (40b)$$

where

$$A_1 = c\eta^3$$

$$A_2 = \frac{2c}{\xi} \eta^3 + 6c\eta' \eta^2$$

$$A_3 = -\frac{1}{\xi^2} \eta^3 + 3(2c+\nu) \frac{\eta' \eta^2}{\xi} + 3c\eta'' \eta^2 + 6c(\eta')^2 \eta$$

$$A_4 = \frac{1}{\xi^3} \eta^3 - \frac{3\eta' \eta^2}{\xi^2} + (3\eta'' \eta^2 + 6\eta(\eta')^2) \frac{\nu}{\xi}$$

$$\alpha = A \left(\frac{a}{h_o} \right)^2$$

$$\lambda = \omega^2$$

$$Q^* = \frac{Aa}{h_o} Q$$

The above equations together with the boundary conditions selected from Table I, constitute a two-point boundary problem which is solved through the solution of the related initial value problem.

Table-I

Type of Edge	Boundary Condition at Edge $\xi_1 = R \text{ or } 1$	
Clamped Immovable	$g = 0$ $g' = 0$	$cf' - \frac{\nu}{\xi} f = 0$
Clamped Movable	$g = 0$ $g' = 0$	$\frac{f}{\xi} = 0$
Hinged Immovable	$g = 0$ $cg'' + \frac{\nu}{\xi} g' = 0$	$cf' - \frac{\nu}{\xi} f = 0$
Hinged Movable	$g = 0$ $cg'' + \frac{\nu}{\xi} g' = 0$	$\frac{f}{\xi} = 0$
Free	$cg'' + \frac{\nu}{\xi} g' = 0$ $cg''' + c[\frac{1}{\xi} + \frac{3\eta'}{\eta}]g''$ $- [\frac{1}{\xi^2} - \frac{3\eta'}{\eta} \frac{\nu}{\xi}]g' = 0$	$\frac{f}{\xi} = 0$

CHAPTER III

NUMERICAL ANALYSIS

The solutions of nonlinear boundary values and nonlinear eigenvalue problems, are very complicated and hence these are solved by converting them to initial value problems.

Initial Value Method

Due to the extremely nonlinear form of these equations, after conversion to an initial value problem the shooting technique is used. An associated variational problem is developed and used in Newton-Raphson iteration scheme.

The governing equations (40a) and (40b) can be written as a system of six first order differential equations,

$$\frac{d\bar{Y}}{d\xi} = \bar{H}(\xi, \bar{Y}, \alpha, \lambda, Q^*) \quad , \quad R < \xi < 1 \quad (41)$$

where

$$\bar{Y}(\xi) = \begin{Bmatrix} g \\ g' \\ g'' \\ g''' \\ f \\ f' \end{Bmatrix} = \begin{Bmatrix} y_1 \\ y_2 \\ y_3 \\ y_4 \\ y_5 \\ y_6 \end{Bmatrix} \quad , \quad ()' = \frac{d}{d\xi} \quad , \text{ and}$$

\bar{H} is the appropriately defined (6x1) vector function:

$$\bar{H} = \left\{ \begin{array}{l} y'_1 \\ y'_2 \\ y'_3 \\ y'_4 \\ y'_5 \\ y'_6 \end{array} \right\} \left\{ \begin{array}{l} y_2 \\ y_3 \\ y_4 \\ -\frac{A_2}{A_1} y_4 - \frac{A_3}{A_1} y_3 - \frac{A_2}{A_1} y_2 + \frac{\eta\lambda}{A_1} y_1 \frac{(c-v^2)}{(1-v^2)} \\ + \frac{9(c-v^2)}{\xi A_1} \alpha (y_3 y_5 + y_2 y_6) + \frac{(c-v^2)}{\sqrt{\alpha} A_1} Q^* \\ y_6 \\ (1 - \frac{\eta'}{\eta} v\xi) \frac{y_5}{\xi} - (1 - \frac{\eta'}{\eta} \xi) \frac{y_6}{\xi} - \frac{\eta}{2\xi} (y_2)^2 \end{array} \right\}$$

The parameters α and λ are at present not known and hence two additional restraints are imposed to evaluate these. One component of $\bar{Y}(1)$ is normalized to fulfill the requirement.

The boundary conditions can be expressed as:

$$M\bar{Y}(1) = \left\{ \begin{array}{l} 1 \\ 0 \\ 0 \\ 0 \end{array} \right\} \quad (42a)$$

$$N\bar{Y}(R) = \left\{ \begin{array}{l} 0 \\ 0 \\ 0 \\ 0 \end{array} \right\} \quad (42b)$$

where, M and N are (4×6) and (3×6) coefficient matrices of rank 4 and 3 respectively. The first row of M normalizes a component of $\bar{Y}(1)$, and the remaining rows of M and N are obtained by taking into consideration the boundary conditions at the two ends.

The corresponding initial value problem may be expressed as

$$\frac{d\bar{Z}}{d\xi} = \bar{H}(\xi, \bar{Z}; \alpha, \lambda, Q^*) \quad (43a)$$

$$\bar{Z}(1) = \begin{Bmatrix} z_1 \\ z_2 \\ z_3 \\ z_4 \\ z_5 \\ z_6 \end{Bmatrix} = \bar{\gamma} \quad (43b)$$

where $\bar{\gamma}$ is a (6×1) vector of initial values.

Substitution of these initial values $\bar{Z}(1) = \bar{\gamma}$ into the equation (42a) yields:

$$M\bar{Z}(1) = M\bar{\gamma} = \begin{Bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{Bmatrix} \quad (44)$$

As M is of rank four, two additional values are required, and by the implicit function theorem,

$$\bar{\gamma} = \bar{\gamma}^*(\eta_1, \eta_2)$$

is a solution of equation (44), and η_1, η_2 are arbitrary initial values.

The related initial value problem can thus be written as:

$$\frac{d\bar{Z}}{d\xi} = \bar{H}(\xi, \bar{Z}; \alpha, \lambda, Q^*) \quad (45a)$$

$$\bar{Z}(1) = \bar{\gamma}^*(\eta_1, \eta_2) \quad (45b)$$

The above contains the initial values, which satisfy the boundary conditions (42a).

Assuming a continuous function $Q^*(\xi)$, a solution of the initial value problem (45) is obtained over a closed interval $[R, 1]$, and is denoted by

$$\bar{Z} = \bar{Z}(1; \bar{\eta}, \alpha) \quad , \quad \bar{\eta} = \begin{Bmatrix} \eta_1 \\ \eta_2 \\ \lambda \end{Bmatrix}$$

From the boundary condition (42b),

$$N\bar{Z}(R; \bar{\eta}, \alpha) = 0 \quad (46)$$

Stating a well-know matrix theorem, "For a system of equations

$N\bar{Z}(\xi; \bar{\eta}, \alpha) = \bar{0}$ a necessary and sufficient condition for a unique solution

$\bar{\eta} = \bar{\eta}(\alpha)$, is that the determinant of the Jacobian matrix, $J = \frac{\partial}{\partial \bar{\eta}} [N\bar{Z}(R, \bar{\eta}, \alpha)]$ is not equal to zero," assuming also that \bar{Z} is continuously differentiable with respect to $\bar{\eta}$ and α .

Thus there exists a locally unique function at $\xi = R$, such that,

$$N\bar{Z}(R, \eta(\alpha), \alpha) = \bar{0}$$

Or, we can put it as

$$\bar{Y}(\xi, \alpha) = \bar{Z}(\xi, \bar{\eta}(\alpha), \alpha) .$$

This forms an α -dependent family of solutions to (42) each of which is a solution to the initial value problem.

For a fixed value of α , say α^0 , equations (46) reduce to three transcendental equations,

$$N\bar{Z}(R, \bar{\eta}, \alpha^0) = \bar{0} \quad (47)$$

A root η^0 of (47) may be obtained by Newtons iteration method. Starting with an initial guess, $\bar{\eta} = \bar{\eta}_1$ the iterative sequence,

$$\bar{\eta}_{k+1} = \bar{\eta}_k + \Delta \bar{\eta}_k \quad , \quad k = 1, 2, 3, \dots \quad (48a)$$

is generated.

This can be expanded in the Taylor's Series. Retaining only the linear terms, gives,

$$\Delta \bar{\eta}_k = -[N \frac{\partial}{\partial \bar{\eta}_k} Z(R, \eta_k, \alpha^0)]^{-1} N \bar{Z}(R; \bar{\eta}_k, \alpha^0) \quad (48b)$$

where, at the k^{th} step, the (6×3) matrix J_1 is defined as,

$$(J_1) = \left(\frac{\partial \bar{Z}}{\partial \bar{\eta}} \right)_{\xi=R} = \left(\frac{\partial Z_i}{\partial \eta_j} \right)_{\xi=R} \quad \begin{array}{l} i = 1, 2, \dots, 6 \\ j = 1, 2, 3 \end{array} \quad (49)$$

Physically, this represents the change of final values with respect to $\bar{\eta}$.

The expression $N \bar{Z}(\xi, \bar{\eta}_k, \alpha^0)$ represents the k^{th} error vector.

If the initial guess $\bar{\eta}$, is in the neighborhood of η^0 , then the convergence of the sequence $\bar{\eta}_k$ to the root $\bar{\eta}^0$ is feasible.

In order to generate the sequence $\bar{\eta}_k$, it is necessary to evaluate the matrix $(J_1)_k$ at each step, k , of the iteration process. To do this, an associated variational problem is introduced.

Formally differentiating (45) with respect to $\bar{\eta}$, gives

$$\frac{d}{d\xi} \left(\frac{\partial \bar{Z}}{\partial \bar{\eta}} \right) = \frac{\partial \bar{H}}{\partial \bar{\eta}} + \left(\frac{\partial \bar{H}}{\partial \bar{Z}} \right) \left(\frac{\partial \bar{Z}}{\partial \bar{\eta}} \right) \quad (50a)$$

$$\left(\frac{\partial \bar{Z}}{\partial \bar{\eta}} \right)_{\xi=1} = \frac{\partial \bar{\gamma}^*}{\partial \bar{\eta}} \quad (50b)$$

which constitute eighteen first order equations, and a corresponding set of initial values.

$$\frac{dZ_1}{d\xi} = Z_2$$

$$\frac{dZ_2}{d\xi} = Z_3$$

$$\frac{dZ_3}{d\xi} = Z_4$$

$$\begin{aligned} \frac{dZ_4}{d\xi} = & n^2 \omega^2 \frac{(c-v^2)}{(1-v^2)} y_1 - A_4 y_2 - A_3 y_3 - A_2 y_4 \\ & + \frac{9(c-v^2) \frac{\alpha}{\xi} (y_3 y_5 + y_2 y_6)}{A_1} + \frac{(c-v^2) Q^*}{\sqrt{\alpha} A_1} \end{aligned} \quad (51)$$

$$\frac{dZ_5}{d\xi} = Z_6$$

$$\frac{dZ_6}{d\xi} = \frac{1}{c} \left[1 - \frac{n'}{n} \xi v \right] \frac{1}{\xi^2} y_5 - \left[1 - \frac{n'}{n} \xi \right] \frac{1}{\xi} y_6 - \frac{n}{2\xi c} y_2^2$$

Differentiating the above with respect to (n_1, n_2, λ) we get the following variational equations:

$$\frac{d}{d\xi} \left(\frac{\partial Z_1}{\partial n_1} \right) = \frac{\partial Z_2}{\partial n_1}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_2}{\partial n_1} \right) = \frac{\partial Z_3}{\partial n_1}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_3}{\partial n_1} \right) = \frac{\partial Z_4}{\partial n_1}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_4}{\partial n_1} \right) = & \left(n^2 \omega^2 \frac{(c-v^2)}{(1-v^2)} \frac{\partial Z_1}{\partial n_1} - A_4 \frac{\partial Z_2}{\partial n_1} - A_3 \frac{\partial Z_3}{\partial n_1} - A_2 \frac{\partial Z_4}{\partial n_1} \right. \\ & + 9(c-v^2) \frac{\alpha}{\xi} \left(\frac{\partial Z_3}{\partial n_1} Z_5 + \frac{\partial Z_5}{\partial n_1} Z_3 + \frac{\partial Z_6}{\partial n_1} Z_2 \right. \\ & \left. \left. + \frac{\partial Z_2}{\partial n_1} Z_6 \right) \right) / A_1 \end{aligned} \quad (52a)$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_5}{\partial n_1} \right) = \frac{\partial Z_6}{\partial n_1}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_6}{\partial \eta_1} \right) &= [1 - \frac{\eta'}{\eta} \xi v] \frac{\partial Z_5}{\partial \eta_1} / c\xi^2 - [1 - \frac{\eta'}{\eta} \xi] \frac{\partial Z_6}{\partial \eta_1} / \xi \\ &\quad - \frac{\eta}{c\xi} Z_2 \frac{\partial Z_2}{\partial \eta_1} \end{aligned}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_1}{\partial \eta_2} \right) = \frac{\partial Z_2}{\partial \eta_2}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_2}{\partial \eta_2} \right) = \frac{\partial Z_3}{\partial \eta_2}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_3}{\partial \eta_2} \right) = \frac{\partial Z_4}{\partial \eta_2}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_4}{\partial \eta_2} \right) &= \left[\eta^2 \omega^2 \frac{(c-v^2)}{(1-v^2)} \frac{\partial Z_1}{\partial \eta_2} - A_4 \frac{\partial Z_2}{\partial \eta_2} - A_3 \frac{\partial Z_3}{\partial \eta_2} - A_2 \frac{\partial Z_4}{\partial \eta_2} \right. \\ &\quad \left. + 2(c-v^2) \frac{\alpha}{\xi} \left(\frac{\partial Z_3}{\partial \eta_2} Z_5 + \frac{\partial Z_5}{\partial \eta_2} Z_3 + \frac{\partial Z_2}{\partial \eta_2} Z_6 \right. \right. \\ &\quad \left. \left. + \frac{\partial Z_6}{\partial \eta_2} Z_2 \right) \right] / A_1 \end{aligned} \quad (52b)$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_5}{\partial \eta_2} \right) = \frac{\partial Z_6}{\partial \eta_2}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_6}{\partial \eta_2} \right) &= [1 - \frac{\eta'}{\eta} \xi v] \frac{\partial Z_5}{\partial \eta_2} / c\xi^2 - [1 - \frac{\eta'}{\eta} \xi] \frac{\partial Z_6}{\partial \eta_2} / \xi \\ &\quad - \frac{\eta}{\xi c} Z_2 \frac{\partial Z_2}{\partial \eta_2} \end{aligned}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_1}{\partial \lambda} \right) = \frac{\partial Z_2}{\partial \lambda}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_2}{\partial \lambda} \right) = \frac{\partial Z_3}{\partial \lambda}$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_3}{\partial \lambda} \right) = \frac{\partial Z_4}{\partial \lambda}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_4}{\partial \lambda} \right) = & \left[\eta^2 \omega^2 \frac{(c-v^2)}{(1-v^2)} \frac{\partial Z_1}{\partial \lambda} - A_4 \frac{\partial Z_2}{\partial \lambda} - A_3 \frac{\partial Z_3}{\partial \lambda} - A_2 \frac{\partial Z_4}{\partial \lambda} \right. \\ & + \eta^2 Z_1 + 9(c-v^2) \frac{\alpha}{\xi} \left(\frac{\partial Z_3}{\partial \lambda} A_5 + \frac{\partial Z_5}{\partial \lambda} Z_3 \right. \\ & \left. \left. + \frac{\partial Z_2}{\partial \lambda} Z_6 + \frac{\partial Z_6}{\partial \lambda} Z_2 \right) \right] / A_1 \end{aligned} \quad (52c)$$

$$\frac{d}{d\xi} \left(\frac{\partial Z_5}{\partial \lambda} \right) = \frac{\partial Z_6}{\partial \lambda}$$

$$\begin{aligned} \frac{d}{d\xi} \left(\frac{\partial Z_6}{\partial \lambda} \right) = & [1 - \frac{\eta'}{\eta} \xi v] \frac{\partial Z_5}{\partial \lambda} / c\xi^2 - [1 - \frac{\eta'}{\eta}] \frac{\partial Z_6}{\partial \lambda} / \xi \\ & - \frac{\eta}{\xi c} Z_2 \frac{\partial Z_2}{\partial \lambda} \end{aligned}$$

For a given vector $\bar{\eta}$ and $\alpha = \alpha^0$, this derived problem along with the initial value problem (45) may be integrated simultaneously on the interval $[R, 1]$. Corresponding to a given value of $\bar{\eta}$ and $\alpha = \alpha^0$, the calculation of the resulting solution to the variational problem at $\xi = 1$ provides the Jacobian (J_1) . By setting $\bar{\eta} = \bar{\eta}_1$ and integrating equations (45) & (50) from $\xi=1$ to $\xi=R$, gives the first correction vector $\bar{\eta}_2$. By repeating this procedure, the desired sequence $\bar{\eta}_k$ is obtained, which converges to $\bar{\eta}^0$ within a specified error bound to the accuracy of the system.

Having obtained $\bar{\eta}^0$, corresponding to α^0 , the value of α can now be perturbed,

$$\alpha = \alpha^0 + \Delta \alpha^0 = \alpha^1$$

The problem is reinstated, for this value of α , starting from $\bar{\eta} = \bar{\eta}^0$. If $\Delta\alpha^0$ is small, then $\bar{\eta}^0$ is contained in the new contraction domain of Newton's method, the iterations converging to $\bar{\eta}^1$ corresponding to $\alpha = \alpha^1$. Successive completion of this operation j number of times, yields,

$$\bar{\eta}^i = \bar{\eta}^1(\alpha^i) \quad , \quad i = 0, 1, 2, \dots, j$$

By setting $\alpha = \alpha^i + \Delta\alpha^j = \alpha^{j+1}$ and starting integration from $\bar{\eta}^j$, one obtains $\bar{\eta}^{j+1}$ provided $\Delta\alpha^j$ results in convergence.

The range of α is limited as the elastic plate cannot withstand unbounded amplitudes.

CHAPTER IV

NUMERICAL COMPUTATIONS

The above theoretical analysis suggests the use of a numerical integration technique.

Use is made of a fourth order Runge-Kutta-Gill method to integrate the initial value problems (45) and (50) over the interval $[R,1]$. The following approach is suggested.

The problem is first reduced to that of a free vibration by setting $Q^* = 0$ and $\alpha^0 = 0$. By subjecting this equation to a particular set of boundary conditions the linear eigenvalues and mode shape functions are determined.

This information leads to a basis for making a reasonable starting guess, η_1 , required by the initial value method.

For $\bar{\eta} = \bar{\eta}_1$, the initial value problems (45) and (50) are integrated numerically over $[R,1]$ with a step size $\Delta\mu = 1/40$. Successive correction is carried out till all equations in (47) satisfy the range of prescribed error; this being consistent with the order $O(|\Delta\mu|^4)$, of Runge Kutta Gill method.

By gradually incrementing the value of α and restarting the correction and integration procedure from the values of $(\eta_1, \eta_2, \lambda)$, obtained from the solution corresponding to the previous α , the resonance curve and other solutions are evaluated. This procedure is terminated at a particular value of α^m , because of reasons mentioned earlier.

Cases Considered:

The cases considered are:

- (1) Annular circular plate with convex variable thickness and free on the outside, fixed on the inside.
- (2) Annular circular plate with parabolic variable thickness and free on the outside, fixed on the inside.

The figures pertaining to the above two cases are as shown in Appendix I.

The governing equations and boundary conditions are written as:

$$\frac{d\bar{V}}{d\xi} = \bar{H}(\xi, \bar{V}; \alpha, \lambda, Q^*) \quad ; \quad R < \xi < 1 \quad (53a)$$

$$M \bar{V}(1) = \begin{Bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{Bmatrix} \quad (53b)$$

$$N \bar{V}(R) = \begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix} \quad (53c)$$

where

$$M = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & v & c & 0 & 0 & 0 \\ 0 & -(1 - \frac{3\eta'}{\eta} v) & c(-1 + \frac{3\eta'}{\eta}) & c & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{pmatrix}$$

$$N = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{v}{R} & c \end{pmatrix}$$

The related initial value problem, is defined as,

$$\frac{d\bar{Z}}{d\xi} = \bar{H}(\xi, \bar{Z}; \alpha, \lambda, Q^*) \quad (54a)$$

$$\bar{Z}(1) = \bar{\gamma}^*(\eta_1, \eta_2) = \begin{Bmatrix} 1 \\ \eta_1 \\ -\frac{\nu}{c} \eta_1 \\ \frac{(1+\nu)}{c} \eta_1 \\ 0 \\ \eta_2 \end{Bmatrix} \quad (54b)$$

and the variational problem is

$$\frac{d}{d\xi} \left\{ \frac{\partial \bar{Z}}{\partial \eta_1} \right\} = \left(\frac{\partial \bar{H}}{\partial \bar{Z}} \right) \left\{ \frac{\partial \bar{Z}}{\partial \eta_1} \right\} \quad (53a)$$

$$\frac{d}{d\xi} \left\{ \frac{\partial \bar{Z}}{\partial \eta_1} \right\} = \begin{Bmatrix} 0 \\ 1 \\ -\frac{\nu}{c} \\ \frac{1+\nu}{c} \\ 0 \\ 0 \end{Bmatrix} \quad (55b)$$

$$\frac{d}{d\xi} \left\{ \frac{\partial \bar{Z}}{\partial \eta_2} \right\} = \left(\frac{\partial \bar{H}}{\partial \bar{Z}} \right) \left\{ \frac{\partial \bar{Z}}{\partial \eta_2} \right\} \quad (55c)$$

$$\left\{ \frac{\partial \bar{Z}}{\partial \eta_2} \right\} = \begin{Bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1 \end{Bmatrix} \quad (55d)$$

$$\frac{d}{d\xi} \left\{ \frac{\partial Z}{\partial \lambda} \right\} = \left(\frac{\partial \bar{H}}{\partial \bar{Z}} \right) \left\{ \frac{\partial \bar{Z}}{\partial \lambda} \right\} + \left\{ \frac{\partial \bar{H}}{\partial \lambda} \right\} \quad (55e)$$

$$\left\{ \frac{\partial \bar{Z}}{\partial \lambda} \right\} = \begin{pmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{pmatrix} \quad (55f)$$

The unification of the above is as symbolized in equation (50) with $\bar{n} = (n_1, n_2, \lambda)$ while the value of α is held constant.

$$\begin{pmatrix} \Delta n_1 \\ \Delta n_2 \\ \Delta n_3 \end{pmatrix} = - \begin{pmatrix} \frac{\partial Z_1}{\partial n_1} & \frac{\partial Z_1}{\partial n_2} & \frac{\partial Z_1}{\partial \lambda} \\ \frac{\partial Z_2}{\partial n_1} & \frac{\partial Z_2}{\partial n_2} & \frac{\partial Z_2}{\partial \lambda} \\ c \frac{\partial Z_6}{\partial n_1} - \frac{\nu}{\xi} \frac{\partial Z_5}{\partial n_1} & c \frac{\partial Z_6}{\partial n_2} - \frac{\nu}{\xi} \frac{\partial Z_5}{\partial n_2} & c \frac{\partial Z_6}{\partial \lambda} - \frac{\nu}{\xi} \frac{\partial Z_5}{\partial \lambda} \end{pmatrix}_{\xi=R}^{-1} \begin{pmatrix} Z_1 \\ Z_2 \\ c Z_6 - \frac{\nu}{\xi} Z_5 \end{pmatrix}_{\xi=R}$$

provides the linear correction of the estimated values (n_1, n_2, λ) , where Z_i are components of \bar{Z} .

For each value of α^i , a sequence which defines discrete values of α , successive corrections of (n_1, n_2, λ) were performed, till the final values of $\bar{Z}(R)$ are satisfied,

$$\max_{1 \leq i \leq 3} \left| \sum_{j=1}^6 n_{ij} Z_j(R) \right| \leq 0.1 \times 10^{-5} \quad (57)$$

where $n_{ij} = N$.

Perturbing the amplitude α , the process is started using the values of \bar{n} obtained after the first cycle is completed. At least five to six iterations were required for most values of α .

Stresses:

From all the discussion carried out so far, it is obvious that the amplitude influences the distribution of bending stress to a greater extent, as these are related to the derivatives of the transverse shape function $g(\xi)$.

The expressions for the bending and membrane stresses are:

$$\sigma_r^b = - \frac{6M_r}{h^2} = \frac{h_0}{a} \frac{\eta(\xi)}{2a_{22}(c-v^2)} [c\chi'' + \frac{v}{\xi}\chi']$$

$$\sigma_\theta^b = - \frac{6M_\theta}{h^2} = \frac{h_0}{a} \frac{\eta(\xi)}{2a_{22}(c-v^2)} [\frac{1}{\xi}\chi' + \chi'']$$

$$\sigma_r^m = \frac{N_r}{h} = \frac{1}{a_{22}\eta(\xi)} \frac{\phi}{\xi}$$

$$\sigma_\theta^m = \frac{N_\theta}{h} = \frac{1}{a_{22}\eta(\xi)} \phi'$$

These are the radial bending stress, circumferential bending stress, radial membrane stress and circumferential membrane stress respectively, in terms of the dimensionless deflection, χ , and stress function ϕ , respectively. Taking the previous assumption into consideration, i.e.,

$$\chi(\xi, \tau) = Ag(\xi) \sin \omega \tau$$

$$\phi(\xi, \tau) = A^2 f(\xi) \sin^2 \omega \tau$$

and also taking into consideration the fact that when time, τ , is equal to the odd multiple of $\pi/2\omega$, we have the maximum stresses,

$$\frac{\sigma_r^b}{h_0^2} a^2 a_{22} = \pm \frac{\sqrt{\alpha} \eta(\xi)}{2(c-v^2)} (cg_{\xi\xi} + \frac{v}{\xi} g_\xi) \quad (58a)$$

$$\frac{\sigma_\theta^b}{h_0^2} a^2 a_{22} = \pm \frac{\sqrt{\alpha} \eta(\xi)}{2(c-v^2)} (vg_{\xi\xi} + \frac{1}{\xi} g_\xi) \quad (58b)$$

$$\frac{\sigma_r^m a^2 a_{22}}{h_o^2} = \frac{\alpha}{\eta(\xi)} \left(\frac{f}{\xi} \right) \quad (58c)$$

$$\frac{\sigma_\theta^m a^2 a_{22}}{h_o^2} = \frac{\alpha}{\eta(\xi)} (f') \quad (58d)$$

The above equations were used in the computer program.

CHAPTER 5: CONCLUSIONS

This study is based on the supposition of harmonic oscillations. The assumed solutions (35) contradict the inseparability of modes in Von Karman's dynamic equations. Nevertheless, for moderate amplitude of vibrations, physical arguments may be made to justify such assumptions.

The time coordinate function is assumed and eliminated by a time averaging method. By elimination of the time variable, an infinite number of degrees of freedom in the space coordinate function is achieved. By the numerical integration technique used the solution of the continuous system is obtained at a number of discrete points. This reduces the number of degrees of freedom to the number of points considered.

The two cases studied are an annular plate with parabolic variable thickness and of convex variable thickness. Both are of the same volume and have the same boundary conditions of free on the outside and fixed on the inside.

The responses of the plates exhibit a behavior similar to that of a hard spring.

The parabolic variable thickness plate is stiffer than the convex variable thickness one, as is evident from the frequency responses obtained.

The bending stresses of the first plate are slightly higher than those of the second plate and the membrane stresses are just the reverse.

The membrane stresses have significant magnitudes even at relatively low amplitudes. This is due to a stress concentration factor at the edge of the hole, and is called the boundary layer.

The results obtained were compatible with those obtained by Sandman [2]. In this study the higher modes and stability of vibration have not been considered. So also, various other boundary conditions are possible, these are thus left open for future investigation.

REFERENCES

1. Langhaar, H. L., *Energy Methods in Applied Mechanics*, John Wiley and Sons, Inc., 1962, pp. 159-162.
2. Forray, M. J., *Variational Calculus in Science and Engineering*, McGraw-Hill Book Co., 1962.
3. Lehnitzsky, S. G., *Anisotropic Plates*, Moscow, 1957, Gorton and Breach Science Publishers, 1968.
4. Keller, H. B., *Numerical Methods for Two-Point Boundary Value Problems* Ginn Blaisdell, 1968.
5. Stoker, J. J., *Nonlinear Vibrations in Mechanical and Electrical Systems*, Interscience Publishers, Inc., 1950, pp. 81-95.
6. Kantorovich, L. V., and Akilov, G. P., *Functional Analysis in Normed Spaces*, International Series of Monographs in Pure and Applied Mathematics, The Macmillan Co., N.Y., 1964, pp. 695-723.
7. Sandman, B. E., *Harmonic Oscillations of Circular and Annular plates at finite amplitudes*, Ph.D. Dissertation, Kansas State University, Manhattan, Kansas, 1970.
8. Timoshenko, S., and Woinowsky-Krieger, S., *Theory of Plates and Shells*, second edition, McGraw-Hill, 1968, pp. 396-428.
9. Mossakowski, J. and Borsuk, K., *Buckling and Vibrations of Circular Plates with Cylindrical Orthotropy*, Applied Mechanics, Tenth International Applied Mechanics Conference, Italy, Edited by Rolla & Koiter, Elsevier, 1960, pp. 266-289.
10. Salzman, A. P., and Patel, S. A., *Natural Frequencies of Orthotropic Circular Plate of Variable Thickness*, NASA, Task NR 064-427, Pisal Report No. 69-6, March, 1969.
11. Vijayakumar, K. and Rao Joga, C. V., *Axisymmetric Vibration and Buckling of Polar Orthotropic Annular Plates*, Proceedings of The Symposium on Recent Development in Analytical, Experimental, and Constructional Techniques Applied to Engineering Structures, Regional Engineering College, Warangal, India, February 19.
12. Huang, C. L., Woo, H. K., *Large Oscillations of an Orthotropic Annulus*, Development in Mechanics, Vol. 7, Proceedings of the Thirteenth Midwestern Mechanics Conference, 1973.
13. Ramiah, G. K. and Vijayakumar, K., *Estimation of Higher Natural Frequencies of Polar Orthotropic Circular Plates*, Journal of Sound and Vibration, Vol. 32, No. 52, Jan. 1974, pp. 265-278.

14. Huang, C. L., Woo, H. K., Walker, H. S., Nonlinear Flexural Oscillations of Partially Tapered Annular Plates, International Journal of Nonlinear Mechanics, Vol. 1, No. 11, pp. 89-97.
15. Pandalai, K. A. V., Patel, S. A., Natural Frequencies of Orthotropic Circular Plates, Journal of American Institute of Aeronautics and Astronautics, Vol. 3, No. 4, 1964, 780-781.
16. Ramchandran, J., Frequency Analysis of Tapered Orthotropic Plates, Journal of Applied Mechanics Transactions of A.S.M.E., Series E, Vol. 39, No. 2, pp. 613-615.
17. Sherbourne, A. N., and Murthy, D. N. S., Elastic Bending of an Anisotropic Circular Plates of Variable Thickness, International Journal of Mechanical Sciences, Vol. 12, No. 12, Dec. 70, pp. 1023-1035.
18. Venkateswara Rao, Kanaka Raju, G., and Raju, I. S., Finite Element Formulation for the Large Amplitude Free Vibration of Beams and Orthotropic Circular Plates, Computers and Structures, Vol. 6, No. 3, 1976, pp. 169-172.
19. Widera, O. E., Asymptotic Theory for Moderately Large Deflections of Anisotropic Plates, Journal of Engineering Mathematics, Vol. 3, No. 3, 1969, pp. 239-244.
20. Maslov, N. M., Bending of a Circular Orthotropic Plate of Varying Thickness, Prinkl. Mekh., Vol. 1, No. 2, 1968.
21. Barakat, A. and Bauman, E., Axisymmetric Vibrations of Thin Circular Plate Having Parabolic Thickness Variation, Journal Acoustical Society of America, Vol. 44, No. 2, 1968, pp. 641-643.
22. Rushton, K. R., Large Deflection of Variable Thickness Plates, International Journal of Mechanical Sciences, Vol. 10, No. 9, 1968, pp. 723-735.
23. Basuli, S., Note on the Large M Deflection of Circular Plate of Variable Thickness Under Lateral Loads, Bulletin International Politehn, Issi, Serie Nova 10 (XIV), Y2, 1964, pp. 63-65.
24. Satyamorthy, M. and Pandalai, K. A. V., Large Amplitude Vibrations of Certain Deformable Bodies, Part 2, Plates and Shells, Journal of Aeronautical Society of India, Vol. 25, No. 1, 1973, pp. 1-10.
25. Degapua, N. J. and Sun, B. C., Transverse Vibrations of a class of Orthotropic Plates, Journal of Applied Mechanics Transactions of A.S.M.E., series E, Vol. 39, No. 2, 613-615.
26. Bauer, C., and Reiss, E. L., Flexural Vibrations of Clamped Orthotropic Plates, Journal of Acoustical Society of America, Vol. 53, No. 5, 1973, pp. 1360-1364.

27. Prikazchikov, V. G. and Zubatenko, V. S., Vibrations of an Orthotropic Plate, Soviet Applied Mechanics, Vol. 10, No. 9, 1976, 1022-1025.
28. Pardoen, G. C., Vibration and Buckling Analysis of Axisymmetric Polar Orthotropic Circular Plates, Computers and Structures, Vol. 4, No. 5, 1974, 951-960.
29. Wah, T., Vibrations of Circular Plates at Large Amplitude, Proceedings ASCE, Journal of Engineering Mechanics Division, EM5, 1963, pp. 1-15.
30. Banerjee, M. M., Note on the Large Amplitude Free Vibration of Orthotropic Circular Plates, Bulletin of the Calcutta Mathematical Society, Vol. 67, No. 1, 1975, pp. 47-53.

Appendix A

Figures

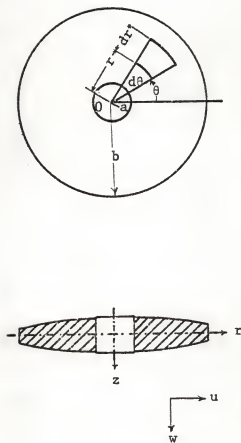


Fig. 1. Circular Plate and the Polar Coordinate System.

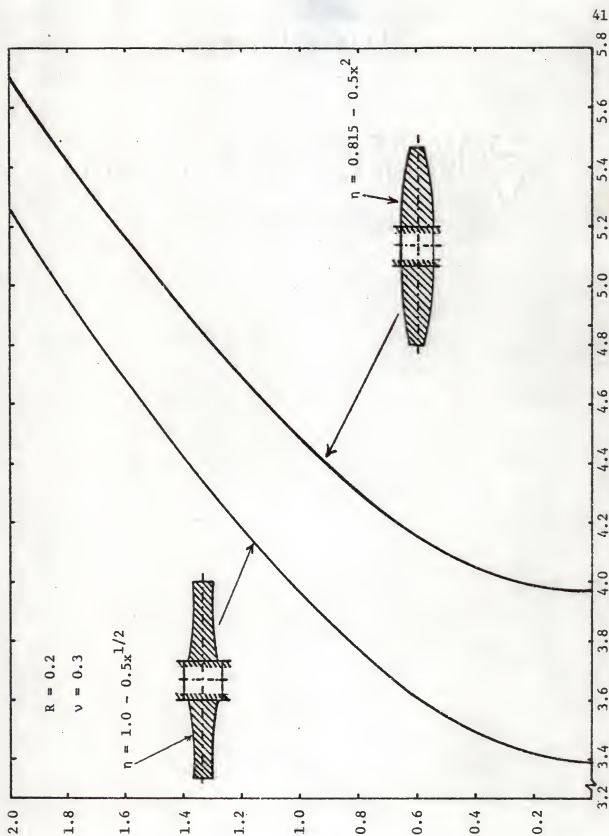


Fig. 2. Frequency responses of the two plates.

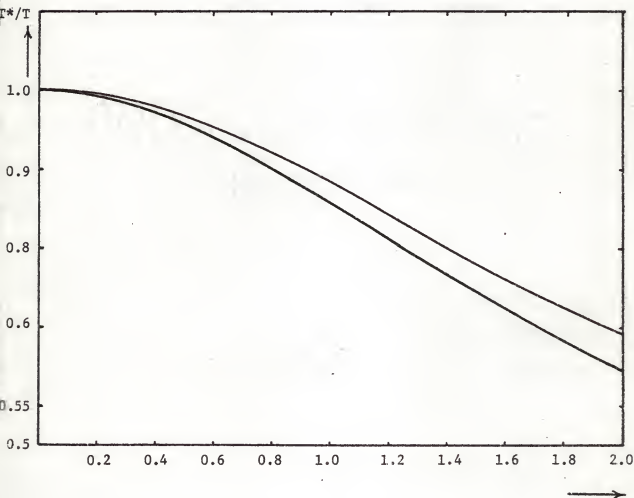


Fig. 3. Normalized frequency responses.

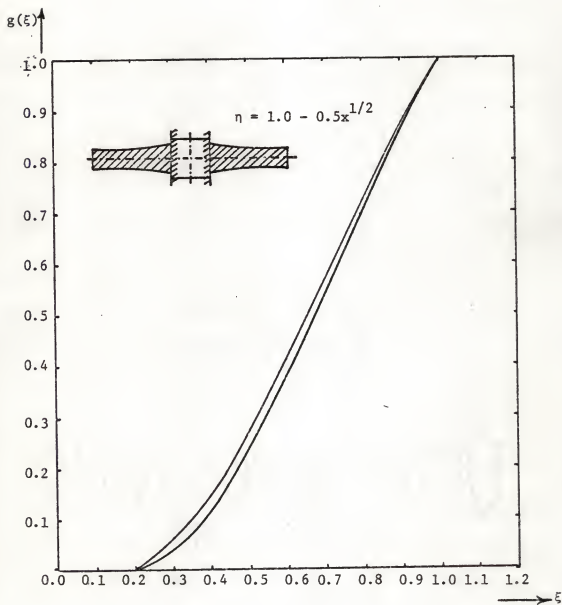


Fig. 4. Shape function for annular, convex-variable thickness plate.

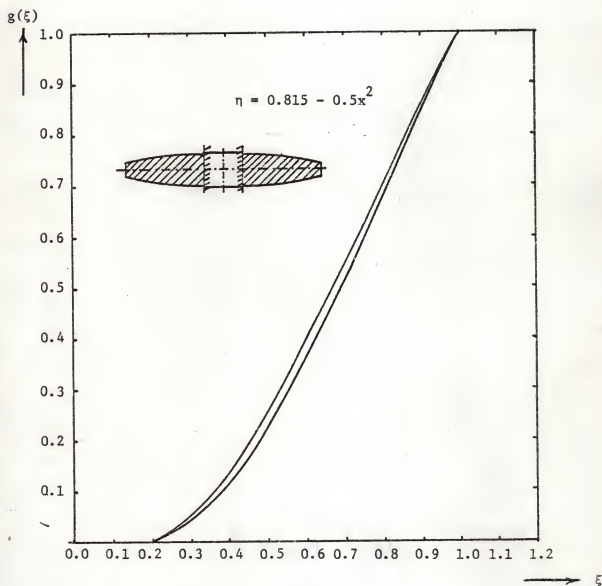


Fig. 5. Shape function for annular, parabolic, variable thickness plate.

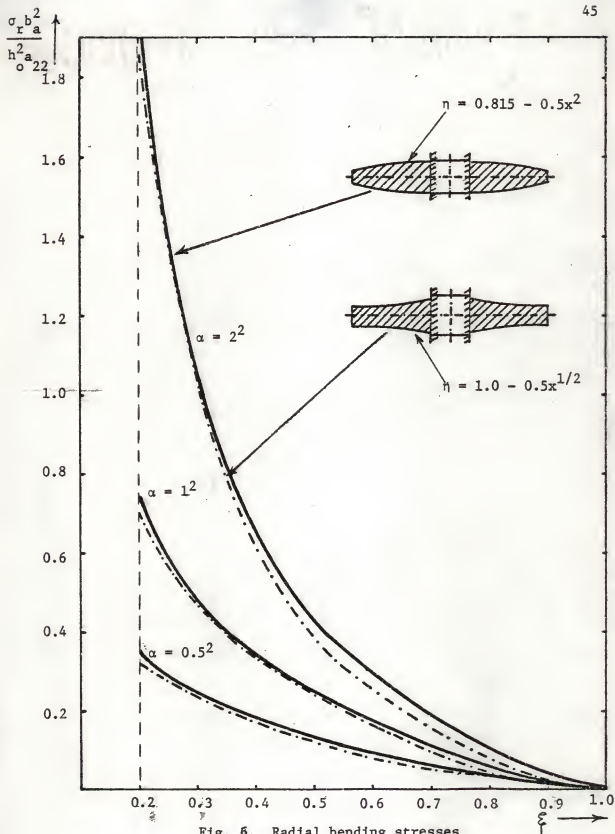


Fig. 6. Radial bending stresses

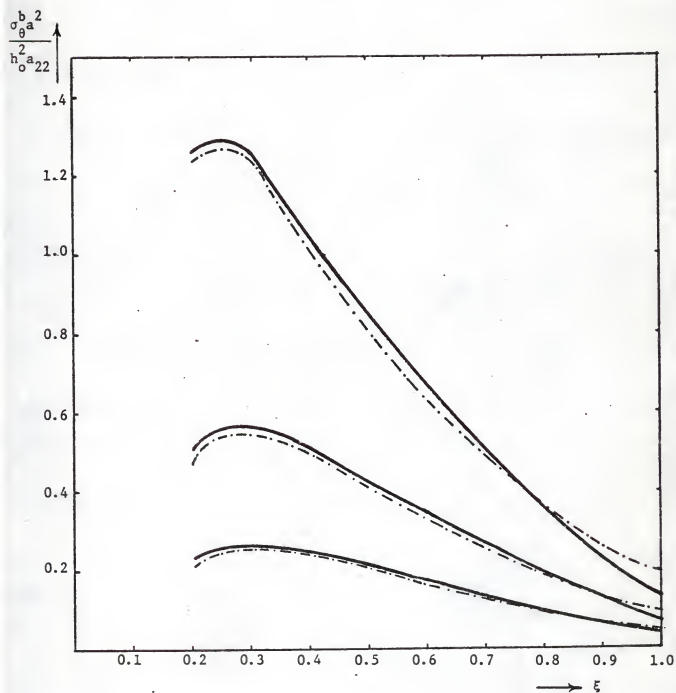


Fig. 7. Circumferential bending stresses.

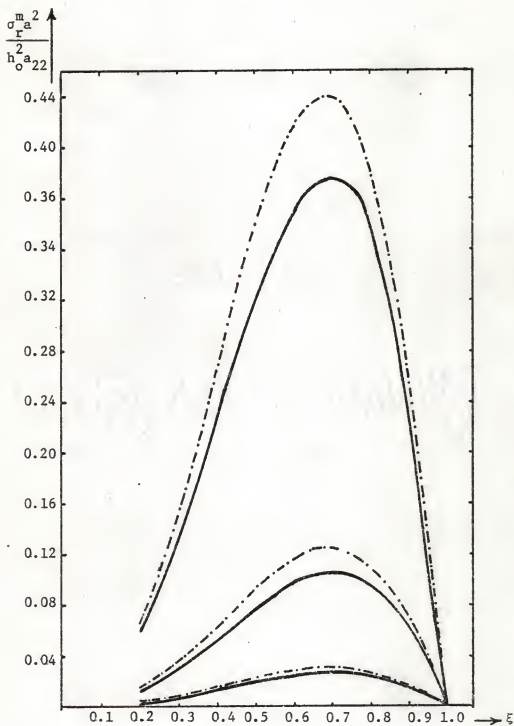


Fig. 8. Radial membrane stresses.

$$\frac{\sigma_{\theta}^m a^2}{h_o^2 a_{22}^2}$$

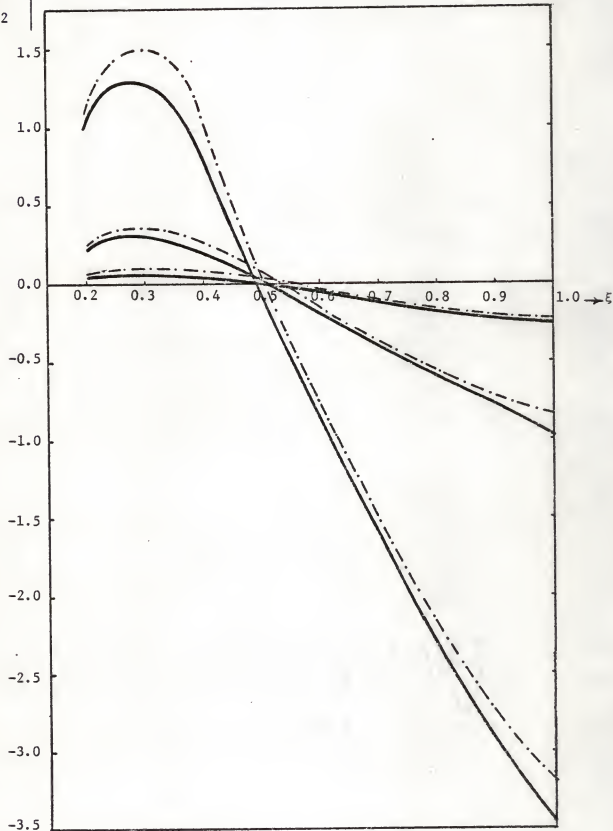


Fig. 9. Circumferential membrane stresses.

APPENDIX B

Computer program for annular orthotropic
convex variable thickness plate --
Backward shooting

\$JOB

C*****
C INITIAL VALUE METHOD - FREE VIBRATION OF AN ANNULAR
C ORTHOTROPIC ,CONVEX VARIABLE THICKNESS PLATE, WITH
C BOUNDARY CONDITIONS AS FIXED ON THE INSIDE AND
C FREE ON THE OUTSIDE
C*****

C*****

C S=RATIO CF ELASTIC CONSTANTS
C E=POISSONS RATIO
C QL=UNIFORM LOADING INTENSITY
C A=AMPLITUDE
C R=RATIO OF INNER TO OUTER RADIUS
C P=EIGENVALUE
C H=STEP SIZE
C ETA=THICKNESS FUNCTION
C DETA=FIRST DERIVATIVE OF ETA
C DDET=SECCND DERIVATIVE OF ETA
C*****

1 IMPLICIT REAL*8(A-H,C-Z), INTEGER(I-N)
2 DIMENSION ETA(41),XX(41),Y(24),C(24),TP(3,3),D(6,41)
3 DIMENSION C(3),Lh(3),PW(3),ER(3)
4 DIMENSION RBS(45),CBS(45),RMS(45),CMS(45)
5 112 FORMAT(5X,'AMP=',D22.14,3X,'FREQ=',D22.14,3X,'FRER=',
6 113 FORMAT(9X,'W',19X,'DW',18X,'DDW',17X,'DDDW')
7 114 FORMAT(4C22.14)
8 115 FORMAT(/9X,'F',15X,'DF')
9 117 FORMAT(1H)
10 120 FORMAT(5X,'S=',F10.3,5X,'E=',F10.3,5X,'QL=',F10.3)
11 121 FORMAT(/9X,'STA',15X,'PRCF')
12 122 FORMAT(6X,'RBS',18X,'CBS',18X,'RMS',18X,'CMS')
13 123 FORMAT(5X,'ITER=',I2)
14 S=0.5
15 H=1./40.
16 LL=41
17 KK=9
18 JK=LL+1-KK
19 IK=1
20 QL=0.0
21 A=0.0
22 E=1./3.
23 R=0.2D-0
24 DA=0.25
25 P=8.3**2
26 ETA1=1.4482
27 ETA2=-0.2426
28 BE=0.5

C*****

C CCONSTRUCT INITIAL VALUES

C*****

29 5CC IT=1
30 DO 9 I=1,24
31 9 Y(1)=0.0C-0
32 Y(1)=1.0D-0
33 Y(2)=ETA1
34 Y(3)=-(E*Y(2))/S
35 Y(4)=[(1.+E)*Y(2)]/S
36 Y(6)=ETA2
37 Y(8)=1.0C-0

```

38      Y(9)=-E/S
39      Y(10)=(1.0+E)/S
40      Y(18)=1.
C*****
C      X=INDEPENDENT VARIABLE
C      INTEGRATION BY BACKWARD SHOOTING
C*****
41      600 X=1.00-0
42      DO 623 I=1,24
43      623 Q(I)=0.00-0
44      DO 620 I=1,6
45      620 D(I,LL)=Y(I)
46      HR=-H
47      DO 624 J=2,JK
48      M=LL+1-J
49      CALL RKG(X,HR,Y,C,P,A,S,E,QL,BE)
50      DO 615 L=1,6
51      615 D(L,M)=Y(L)
52      624 CONTINUE
C*****
C      ER(1)=ERROR VECTOR FOR BOUNDARY CONDITIONS
C*****
53      ER(1)=C(1,KK)
54      ER(2)=D(2,KK)
55      ER(3)=S*D(6,KK)-(E*D(5,KK))/R
C*****
C      CONSTRLCT ERROR NORM
C*****
56      DO 26 I=1,4
57      DER=DABS(ER(I))
58      IF(DER.GT.0.10-05) GO TO 28
59      26 CONTINUE
60      GO TO SC0
61      28 CONTINUE
C*****
C      NEWTONS METHOD (ERROR NORM=(8)Y=0
C      TP(I,J)= THE JACCOBIAN OF THE INITIAL VALUES
C      C(I)=CORRECTION VECTOR
C*****
62      TP(1,1)=Y(7)
63      TP(2,1)=Y(8)
64      TP(3,1)=S*Y(12)-(E*Y(11))/R
65      TP(1,2)=Y(13)
66      TP(2,2)=Y(14)
67      TP(3,2)=S*Y(18)-(E*Y(17))/R
68      TP(1,3)=Y(19)
69      TP(2,3)=Y(20)
70      TP(3,3)=S*Y(24)-(E*Y(23))/R
71      DET=0.00-0
72      CALL CMINV(TP,3,DET,LW,MW)
73      DO 75 I=1,3
74      C(I)=0.0
75      DO 75 J=1,3
76      75 C(I)=C(I)-TP(I,J)*ER(J)
C*****
C      CORRECTED VALUES
C*****
77      DO 76 I=1,6
78      76 Y(I)=D(I,LL)
79      Y(2)=Y(2)+C(1)

```

```

80      Y(6)=Y(6)+C(2)
81      P=P+C(3)
82      Y(3)=- (E*Y(2))/S
83      Y(4)=- ((1.+E)*Y(2))/S
84      DO 77 I=7,24
85      77 Y(I)=0.00-0
86      Y(8)=1.00-0
87      Y(9)=-E/S
88      Y(10)= (1.0+E)/S
89      Y(18)=1.0
90      IT=IT+1
91      IF(17.GT.10) GO TO 550
92      GO TO 600

C*****
C      FINAL RESULTS
C*****
93      500 SRA=DSQRT(A)
94      SP=DSQRT(P)
95      DO 795 J=KK,LL,4
96      DJ=J-1
97      XX(J)=DJ*H
98      ETA(J)=1.-8E*(XX(J)**(0.5))
99      IF(XX(J).GT.0.0) GO TO 905
100     RBS(J)=SRA*C(3,J)/2.*(1.-E)
101     CBS(J)=RBS(J)
102     RMS(J)=A*D(6,J)
103     CMS(J)=RMS(J)
104     GO TO 795
105     905 RBS(J)=SRA*ETA(J)*(S*D(3,J)+E*D(2,J)/XX(J))/2.*(S-E**2)
106     CBS(J)=SRA*ETA(J)*(C(2,J)/XX(J)+E*D(3,J))/2.*(S-E**2)
107     RMS(J)=A*D(5,J)/ETA(J)*XX(J)
108     CMS(J)=A*D(6,J)/ETA(J)
109     795 CCNTINLE

C*****
C      FOR FREQUENCY RATIO
C*****
110     IF(A.GT.0.0) GO TO 906
111     SPC=SP
112     506 SPR=SP/SPQ
113     WRITE(6,117)
114     WRITE(6,120) S,E,CL
115     WRITE(6,117)
116     WRITE(6,112) SRA,SP,SPR
117     WRITE(6,117)
118     WRITE(6,113)
119     DO 901 J=KK,LL,4
120     901 WRITE(6,114) (D(I,J),I=1,4)
121     WRITE(6,115)
122     DO 902 J=KK,LL,4
123     902 WRITE(6,114) (D(L,J),L=5,6)
124     WRITE(6,117)
125     WRITE(6,122)
126     DO 903 J=KK,LL,4
127     903 WRITE(6,114) RBS(J),CBS(J),RMS(J),CMS(J)
128     WRITE(6,117)
129     WRITE(6,123) IT
130     WRITE(6,121)
131     DO 924 J=KK,LL,4
132     924 WRITE(6,114) XX(J),ETA(J)
133     WRITE(6,117)

```

```

C*****
C      PERTURBATION CF AMPLITUDE
C*****
134      A=A+CA
135      IK=IK+1
136      IF(IK.GT.26) GO TO 550
137      ETA1=C(2,LL)
138      ETA2=C(6,LL)
139      P=(SP-0.3)**2
140      GO TO 500
141
142      550 STCP
      END

143      SUBROUTINE RKG(X,H,Y,Q,P,AP,S,E,QL,BE)
144      IMPLICIT REAL*8(A-H,O-Z),INTEGER(I-N)
145      DIMENSION Y(24),Q(24),DY(24),A(2)
146      A(1)=0.2928932188135
147      A(2)=1.707167811665
148      H2=0.5*h
149      CALL DERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
150      DO 13 I=1,24
151      R=H2*CY(I)-C(I)
152      Y(I)=Y(I)+R
153      13 Q(I)=Q(I)+3.0*R-t2*DY(I)
154      X=X+H2
155      DO 60 J=1,2
156      CALL CERIV(X,H,Y,DY,P,AP,S,E,QL,BE)
157      DO 20 I=1,24
158      R=A(J)*(H*DY(I)-C(I))
159      Y(I)=Y(I)+R
160      20 Q(I)=Q(I)+3.0*R-A(J)*H*DY(I)
161      60 CONTINUE
162      X=X+H2
163      CALL DERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
164      DO 26 I=1,24
165      R=(H*DY(I)-2.0*Q(I))/6.0
166      Y(I)=Y(I)+R
167      26 Q(I)=Q(I)+3.0*R-H2*CY(I)
168      RETURN
169      END

170      SUBROUTINE DERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
171      IMPLICIT REAL*8(A-H,C-Z),INTEGER(I-N)
172      DIMENSION Y(24),CY(24)
173      ETA=1.-BE*(X**(.05))
174      DETA=-0.5*BE*(X**(-0.5))
175      ODET=0.25*BE*(X**(-1.5))
176      DO 10 I=1,3
177      10 DY(I)=Y(I+1)
178      DY(5)=Y(6)
179      DO 12 I=7,9
180      12 DY(I)=Y(I+1)
181      DY(11)=Y(12)
182      DO 15 I=13,15
183      15 DY(I)=Y(I+1)
184      DY(17)=Y(18)
185      DO 16 I=19,21
186      16 DY(I)=Y(I+1)
187      DY(23)=Y(24)
188      IF(X.GE.0.1C-02) GO TO 17

```

```

185      DY(4)=3.*P*Y(1)/8.*(ETA**2)+27.*(1.-E**2)*AP*Y(3)*Y(6)
190      1/4.*(ETA**3)
191      DY(4)=DY(4)-9.*(1.+E)*DDET*Y(3)/8.*ETA
192      IF(AP) 18,18,19
193      19 DY(4)=DY(4)+3.*(1.-E**2)*QL/8.*(ETA**3)*DSQRT(AP)
194      18 DY(4)=DY(4)
195      DY(10)=3.*P*Y(7)/8.*(ETA**2)+27.*(1.-E**2)*AP*(Y(9)*
196      1Y(6)+Y(3)*Y(12))/4.*(ETA**3)
197      DY(10)=DY(10)-9.*(1.+E)*DDET*Y(5)/8.*ETA
198      DY(16)=3.*P*Y(13)/8.*(ETA**2)+27.*(1.-E**2)*AP*(Y(15)*
199      1Y(6)+Y(12)*Y(3))/4.*(ETA**3)
200      DY(16)=DY(16)-9.*(1.+E)*DDET*Y(15)/8.*ETA
201      DY(22)=3.*P*Y(19)/8.*(ETA**2)+3.*Y(11)/8.*(ETA**3)+27.
202      1*(1.-E**2)*AP*(Y(21)*Y(6)+Y(3)*Y(24))/4.*(ETA**3)
203      DY(22)=DY(22)-9.*(1.+E)*DDET*Y(21)/8.*ETA
204      DY(6)=0.0
205      DY(12)=0.0
206      DY(18)=0.0
207      DY(24)=0.0
208      GO TO 70
209      17 B0=(9.*(S-(E**2)))/(S*X*(ETA**3))
210      B1=(S-E**2)/((1.-E**2)*(S*(ETA**2)))
211      B2=((6.*DETA)/ETA)+(2./X)
212      B3=(-1./(S*(X**2)))+(3.*DETA*(2.*S+E))/(S*X*ETA)+(3.*
213      1DDET)/ETA+(6.*(DETA**2))/(ETA**2)
214      B4=1./(S*(X**3))-(3.*DETA)/(S*(X**2)*ETA)+(3.*E*DDET)/
215      1(ETA**X)+6.*E*(DETA**2)/(S*X*(ETA**2))
216      DY(4)=B0*AP*(Y(3)*Y(5)+Y(2)*Y(6))+B1*P*Y(1)-B4*Y(2)
217      1-B3*Y(3)-B2*Y(4)
218      IF(AP) 100,100,101
219      101 DY(4)=CY(4)+(S-(E**2))*QL/(S*(ETA**3)*DSQRT(AP))
220      100 DY(4)=DY(4)
221      DY(6)=(1.-E*X*DETA/ETA)*Y(5)/(S*(X**2))-(1.-X*DETA/ETA
222      1)*Y(6)/X-(ETA*(Y(2)**2))/(2.*X*S)
223      DY(10)=B0*AP*(Y(6)*Y(8)+Y(5)*Y(5)+Y(2)*Y(12)+Y(3)*Y(11
224      1)+B1*P*Y(7)-B2*Y(10)-B3*Y(9)-B4*Y(6)
225      DY(12)=(1.-E*X*DETA/ETA)*Y(11)/(S*(X**2))-(1.-X*DETA/
226      1ETA)*Y(12)/X-ETA*Y(2)*Y(9)/(S*X)
227      DY(16)=B0*AP*(Y(5)*Y(15)+Y(3)*Y(17)+Y(14)*Y(6)+Y(2)*
228      1Y(18))+B1*P*Y(13)-B2*Y(16)-B3*Y(15)-B4*Y(14)
229      DY(18)=(1.-E*X*DETA/ETA)*Y(17)/(S*(X**2))-(1.-X*DETA/
230      1ETA)*Y(18)/X-ETA*Y(2)*Y(14)/(S*X)
231      DY(22)=B0*AP*(Y(21)*Y(5)+Y(3)*Y(23)+Y(20)*Y(6)+Y(2)*
232      1Y(24))+B1*P*Y(19)+B1*Y(11)-B2*Y(22)-B3*Y(21)-B4*Y(20)
233      DY(24)=(1.-E*X*DETA/ETA)*Y(23)/(S*(X**2))-(1.-X*DETA/
234      1ETA)*Y(24)/X-ETA*Y(2)*Y(20)/(S*X)
235      70 RETURN
236      END
237
238      SUBROUTINE CMINV(A,N,D,L,M)
239      DIMENSION A(9),L(3),M(3)
240      DOUBLE PRECISION A,D,BIGA,HCLD,CABS
241      D=1.0
242      NK=-N
243      DO 80 K=1,N
244      NK=NK+N
245      L(K)=K
246      M(K)=K
247      KK=NK+K
248      BIGA=A(KK)

```

```

234      DO 20 J=K,N
235      IZ=N*(J-1)
236      DO 20 I=K,N
237      IJ=IZ+I
238      10 IF(DABS(BIGA)-DABS(A(IJ))) 15,20,20
239      15 BIGA=A(IJ)
240      L(K)=I
241      M(K)=J
242      20 CONTINUE
243      J=L(K)
244      IF(J-K) 35,35,25
245      25 KI=K-N
246      DO 30 I=1,N
247      KI=KI+N
248      HCLD=-A(KI)
249      JI=KI-K+J
250      A(KI)=A(JI)
251      30 A(JI)=HCLD
252      35 I=M(K)
253      IF(I-K) 45,45,38
254      38 JP=N*(I-1)
255      DO 40 J=1,N
256      JK=KK+J
257      JI=JP+J
258      HCLD=-A(JK)
259      A(JK)=A(JI)
260      40 A(JI)=HCLD
261      45 IF(BIGA) 48,46,48
262      46 D=0.0
263      RETURN
264      48 DC 55 I=1,N
265      IF(I-K) 50,55,50
266      50 IK=KK+I
267      A(IK)=A(IK)/(-BIGA)
268      55 CONTINUE
269      DG 65 I=1,N
270      IK=NK+I
271      HCLD=A(IK)
272      IJ=I-N
273      DO 65 J=1,N
274      IJ=IJ+N
275      IF(I-K) 60,65,60
276      60 IF(J-K) 62,65,62
277      62 KJ=IJ-I+K
278      A(IJ)=HCLD*A(KJ)+A(IJ)
279      65 CONTINUE
280      KJ=K-N
281      DO 75 J=1,N
282      KJ=KJ+N
283      IF(J-K) 70,75,70
284      70 A(KJ)=A(KJ)/BIGA
285      75 CONTINUE
286      D=D*8IGA
287      A(KK)=1.0/BIGA
288      80 CONTINUE
289      K=N
290      100 K=(K-1)
291      IF(K) 150,150,105
292      105 I=L(K)
293      IF(I-K) 120,120,108

```

Computer program for annular orthotropic
convex variable thickness plate --
Forward shooting.

SJOB

```

C*****
C  INITIAL VALUE METHOD - FREE VIBRATION OF AN ANNULAR
C  ORTHOTROPIC, CONVEY VARIABLE THICKNESS PLATE, WITH
C  BOUNDARY CONDITIONS AS FIXED ON THE INSIDE AND
C  FREE ON THE OUTSIDE
C*****
C  S=RATIO OF ELASTIC CONSTANTS
C  E=POISSON'S RATIO
C  QL=UNIFORM LOADING INTENSITY
C  A=AMPLITUDE
C  R=RATIO OF INNER TO OUTER RADII
C  P=EIGENVALUE
C  H=STEP SIZE
C  ETA=THICKNESS FUNCTION
C  DETA=FIRST DERIVATIVE OF ETA
C  DDET=SECOND DERIVATIVE OF ETA
C*****
1  IMPLICIT REAL*8(A-H,O-Z), INTEGER(I-N)
2  DIMENSION ETA(41), XX(41), Y(30), C(30), TP(4,4), C(8,41)
3  DIMENSION C(4), M(4), LW(4), ER(4)
4  DIMENSION RBS(45), CBS(45), RMS(45), CMS(45)
5  112 FORMAT(5X, 'AMP=', D22.14, 3X, 'FREQ=', D22.14, 3X, 'FRER=',
6  113 FORMAT(9X, 'h', 19X, 'CW', 18X, 'DCW', 17X, 'DCCW')
7  114 FORMAT(4022.14)
8  115 FORMAT(//9X, 'F', 19X, 'DF')
9  117 FORMAT(1H )
10 120 FORMAT(5X, 'S=', F10.3, 5X, 'E=', F10.3, 5X, 'QL=', F10.3)
11 121 FORMAT(//9X, 'STA', 19X, 'PROF')
12 127 FORMAT(6X, 'RBS', 18X, 'CBS', 18X, 'RMS', 18X, 'CMS')
13 123 FORMAT(5X, 'ITER=', I2)
14  S=0.5
15  H=1./40.
16  LL=41
17  KK=9
18  JK=LL+1-KK
19  IK=1
20  QL=0.0
21  A=0.0
22  E=1./3.
23  R=0.2C-0
24  DA=0.25
25  P=4.0**2
26  ETA1=8.00
27  ETA2=-58.0
28  ETA3=0.06
29  BE=0.5
C*****
C  CONSTRUCT INITIAL VALUES
C*****
30 500 IT=1
31  DO 9 I=1,30
32  9 Y(I)=0.00-0
33  Y(1)=1.00-0
34  Y(3)=ETA1
35  Y(4)=ETA2
36  Y(5)=ETA3
37  Y(6)=E*ETA3/(R*S)

```

```

38      Y(9)=1.0
39      Y(16)=1.
40      Y(23)=1.0
41      Y(24)=E/(R*S)
C*****
C      X=INDEPENDENT VARIABLE
C      INTEGRATION BY FORWARD SHOOTING
C*****
42      60C X=0.2D-0
43      DO 623 I=1,30
44      623  Q(I)=0.0C-0
45      DO 620 I=1,6
46      620  C(I,KK)=Y(I)
47      KK=KK+1
48      DO 624 J=KJ,LL
49      CALL RKQ(X,H,Y,Q,P,A,S,E,QL,BE)
50      DO 615 I=1,6
51      615  D(I,J)=Y(I)
52      624  CONTINUE
C*****
C      ER(I)=ERROR VECTOR FOR BOUNDARY CONDITIONS
C*****
53      ER(1)=C(1,LL)-1.0
54      ER(2)=E*C(2,LL)+S*D(2,LL)
55      ER(3)=S*D(4,LL)-S*0.5*D(3,LL)-(1.+1.5*E)*D(2,LL)
56      ER(4)=D(5,LL)
C*****
C      CONSTRUCT ERROR NCRM
C*****
57      CG 26 I=1,4
58      DER=DABS(ER(I))
59      IF(DER.GT.0.1D-C5) GC TO 28
60      26  CONTINUE
61      GO TO 900
62      78  CONTINUE
C*****
C      NEWTONS METHOD (ERROR NCRM={B})Y=0
C      TP(1,J)= THE JACCBIAN OF THE INITIAL VALUES
C      C(I)=CORRECTION VECTOR
C*****
63      TP(1,1)=Y(7)
64      TP(2,1)=E*Y(8)+S*Y(9)
65      TP(3,1)=-(1.+1.5*E)*Y(8)-S*0.5*Y(9)+S*Y(10)
66      TP(4,1)=Y(11)
67      TP(1,2)=Y(13)
68      TP(2,2)=E*Y(14)+S*Y(15)
69      TP(3,2)=-(1.+1.5*E)*Y(14)-S*0.5*Y(15)+S*Y(16)
70      TP(4,2)=Y(17)
71      TP(1,3)=Y(19)
72      TP(2,3)=E*Y(20)+S*Y(21)
73      TP(3,3)=-(1.+1.5*E)*Y(20)-S*0.5*Y(21)+S*Y(22)
74      TP(4,3)=Y(23)
75      TP(1,4)=Y(25)
76      TP(2,4)=E*Y(26)+S*Y(27)
77      TP(3,4)=-(1.+1.5*E)*Y(26)-S*0.5*Y(27)+S*Y(28)
78      TP(4,4)=Y(29)
79      DET=0.0C-0
80      CALL DMINV(TP,4,CET,LW,MW)
81      DO 75 I=1,4
82      C(I)=0.0

```

```

E3      DC 75 J=1.4
E4      75 C(I)=C(I)-TP(I,J)*ER(J)
C*****
C      CORRECTED VALUES
C*****
E5      DO 76 I=1.6
E6      76 Y(I)=C(I,KK)
E7      Y(3)=Y(3)+C(1)
E8      Y(4)=Y(4)+C(2)
E9      Y(5)=Y(5)+C(3)
S0      P=P+C(4)
S1      Y(6)=E*Y(5)/(R*S)
S2      DO 77 I=7.30
S3      77 Y(I)=0.00-0
S4      Y(9)=1.0
S5      Y(16)=1.0
S6      Y(23)=1.0
S7      Y(24)=E/(R*S)
S8      IT=IT+1
S9      IF(IT.GT.10) GO TO 550
100     GO TO 600
C*****
C      FINAL RESULTS
C*****
101     900 SRA=DSQRT(A)
102     SP=DSQRT(P)
103     DO 795 J=KK,LL,4
104     DJ=J-1
105     XX(J)=CJ*M
106     ETA(J)=1.-BE*(XX(J)*E(0.5))
107     IF(XX(J).GT.0.0) GO TO 905
108     RBS(J)=SRA*C(3,J)/2.*(1.-E)
109     CBS(J)=RBS(J)
110     RMS(J)=A+C(6,J)
111     CMS(J)=RMS(J)
112     GO TO 795
113     905 RBS(J)=SRA*ETA(J)*(S*D(3,J)+E*D(2,J)/XX(J))/2.*(S-E**2)
114     CBS(J)=SRA*ETA(J)*D(2,J)/XX(J)+E*C(3,J))/2.*(S-E**2)
115     RMS(J)=A*D(5,J)/ETA(J)*XX(J)
116     CMS(J)=A*C(6,J)/ETA(J)
117     795 CCNTINLE
C*****
C      FCR FREQUENCY RATIO
C*****
118     IF(A.GT.0.0) GO TO 906
119     SPC=SP
120     906 SPR=SP/SPO
121     WRITE(6,117)
122     WRITE(6,120) S,E,CL
123     WRITE(6,117)
124     WRITE(6,112) SRA,SP,SPR
125     WRITE(6,117)
126     WRITE(6,113)
127     DO 901 J=KK,LL,4
128     901 WRITE(6,114) (D(I,J),I=1,4)
129     WRITE(6,115)
130     DO 902 J=KK,LL,4
131     902 WRITE(6,114) (D(L,J),L=5,6)
132     WRITE(6,117)
133     WRITE(6,122)

```

```

134      DO 903 J=KK,LL,4
135 903  WRITE(6,114) RBS(J),CBS(J),RMS(J),CMS(J)
136      WRITE(6,117)
137      WRITE(6,123) IT
138      WRITE(6,121)
139      DO 924 J=KK,LL,4
140 924  WRITE(6,114) XX(J),ETA(J)
141      WRITE(6,117)
C*****
C  PERTURBATION OF AMPLITUDE
C*****
142      A=A+CA
143      IK=IK+1
144      IF(IK.GT.26) GO TO 550
145      ETA1=C(3,KK)
146      ETA2=C(4,KK)
147      ETA3=C(5,KK)
148      P=(SP-0.3)**2
149      GO TO 500
150 550  STOP
151      ENO

152      SUBROUTINE RKG(X,H,Y,Q,P,AP,S,E,QL,BE)
153      IMPLICIT REAL*8(A-H,O-Z),INTEGER(I-N)
154      DIMENSION Y(30),C(30),DY(30),A(2)
155      A(1)=0.292893218E135
156      A(2)=1.7C71067811E65
157      H2=0.5*H
158      CALL CERIV(X,H,Y,DY,P,AP,S,E,QL,BE)
159      DO 13 I=1,30
160      R=H2*DY(I)-Q(I)
161      Y(I)=Y(I)+R
162 13  Q(I)=Q(I)+3.0*R-H2*DY(I)
163      X=X+H2
164      DO 60 J=1,2
165      CALL DERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
166      DO 20 I=1,30
167      R=A(J)*(H*DY(I)-C(I))
168      Y(I)=Y(I)+R
169 20  Q(I)=C(I)+3.0*R-A(J)*H*DY(I)
170 60  CONTINUE
171      X=X+H2
172      CALL CERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
173      DO 26 I=1,30
174      R=(H*DY(I)-2.0*Q(I))/6.0
175      Y(I)=Y(I)+R
176 26  Q(I)=Q(I)+3.0*R-H2*DY(I)
177      RETURN
178      ENO

179      SUBROUTINE CERIV(X,H,Y,DY,P,AP,S,E,CL,BE)
180      IMPLICIT REAL*8(A-H,O-Z),INTEGER(I-N)
181      DIMENSION Y(30),CY(30)
182      ETA=1.-EE*(X**(-0.5))
183      OETA=-C.5*BE*(X**(-0.5))
184      ODET=0.25*BE*(X**(-1.5))
185      DO 10 I=1,3
186 10  DY(I)=Y(I+1)
187      DY(5)=Y(6)
188      DO 12 I=7,9

```

```

189 12 DY(1)=Y(1+1)
190    DY(11)=Y(12)
191    DO 15 I=13,15
192 15 DY(1)=Y(1+1)
193    DY(17)=Y(18)
194    DO 16 I=19,21
195 16 DY(1)=Y(1+1)
196    DY(23)=Y(24)
197    DO 20 I=25,27
198 20 DY(1)=Y(1+1)
199    DY(29)=Y(30)
200    IF(X.GE..0.1C-02) GO TO 17
201    DY(4)=3.*P*Y(1)/8.*(ETA**2)+27.*(1.-E**2)*AP*Y(3)*Y(6)
    1/4.*(ETA**3)
202    DY(4)=CY(4)-9.*(1.+E)*DDET*Y(3)/8.*ETA
203    IF(AP) 18,18,19
204 19 DY(4)=DY(4)+3.*(1.-E**2)*QL/8.*(ETA**3)*DSQRT(AP)
205 18 DY(4)=DY(4)
206    DY(10)=3.*P*Y(7)/8.*(ETA**2)+27.*(1.-E**2)*AP*(Y(9)*
    1Y(6)+Y(3)*Y(12))/4.*(ETA**3)
    DY(10)=CY(10)-9.*(1.+E)*DDET*Y(9)/8.*ETA
207    DY(16)=2.*P*Y(13)/8.*(ETA**2)+27.*(1.-E**2)*AP*(Y(15)*
    1Y(6)+Y(18)*Y(3))/4.*(ETA**3)
208    DY(16)=DY(16)-9.*(1.+E)*DDET*Y(15)/8.*ETA
    DY(22)=3.*P*Y(19)/8.*(ETA**2)+3.*Y(1)/8.*(ETA**3)+27.
    1*(1.-E**2)*AP*(Y(21)*Y(6)+Y(3)*Y(24))/4.*(ETA**3)
209    DY(22)=DY(22)-9.*(1.+E)*DDET*Y(21)/8.*ETA
210    DY(6)=0.0
211    DY(12)=0.0
212    DY(18)=0.0
213    DY(24)=0.0
214    DY(30)=0.0
215    GO TO 70
216
217 17 B0=(9.*(S-(E**2)))/(S*X*(ETA**3))
218    B1=(S-E**2)/((1.-E**2)*(S*(ETA**2)))
219    B2=((6.*DETA)/ETA)+(2./X)
220    B3=(-1./((S*(X**2)))+(3.*DETA*(2.*S+E))/(S*X*ETA)+(3.*
    10DET)/ETA+(6.*(DETA**2))/(ETA**2)
221    B4=1./((S*(X**3))-(3.*DETA)/(S*(X**2)*ETA)+(3.*E*DDET)/
    1(ETA*S*X)+6.*E*(DETA**2)/(S*X*(ETA**2))
222    DY(4)=B0*AP*(Y(3)*Y(5)+Y(2)*Y(6))+B1*P*Y(1)-B4*Y(2)
223    1-B3*Y(3)-B2*Y(4)
    IF(AP) 1C0,100,101
224
225 101 DY(4)=DY(4)+(S-(E**2))*QL/(S*(ETA**3)*DSQRT(AP))
226 100 DY(4)=DY(4)
227    DY(6)=(1.-E*X*DETA/ETA)*Y(5)/(S*(X**2))-(1.-X*DETA/ETA
    1)*Y(6)/X-(ETA*(Y(2)**2))/(2.*X*S)
    DY(10)=B0*AP*(Y(6)*Y(8)+Y(5)*Y(9)+Y(2)*Y(12)+Y(3)*Y(11
    1))+B1*P*Y(7)-B2*Y(10)-B3*Y(9)-B4*Y(8)
228    DY(12)=(1.-E*X*DETA/ETA)*Y(11)/(S*(X**2))-(1.-X*DETA/
    1ETA)*Y(12)/X-ETA*Y(2)*Y(8)/(S*X)
229    DY(16)=B0*AP*(Y(5)*Y(15)+Y(3)*Y(17)+Y(14)*Y(6)+Y(2)*
    1Y(18))+B1*P*Y(13)-B2*Y(16)-B3*Y(15)-B4*Y(14)
230    DY(18)=(1.-E*X*DETA/ETA)*Y(17)/(S*(X**2))-(1.-X*DETA/
    1ETA)*Y(18)/X-ETA*Y(2)*Y(14)/(S*X)
231    DY(22)=B0*AP*(Y(21)*Y(5)+Y(3)*Y(23)+Y(20)*Y(6)+Y(2)*
    1Y(24))+B1*P*Y(19)+B2*Y(22)-B3*Y(21)-B4*Y(20)
232    DY(24)=(1.-E*X*DETA/ETA)*Y(23)/(S*(X**2))-(1.-X*DETA/
    1ETA)*Y(24)/X-ETA*Y(2)*Y(20)/(S*X)
233    DY(28)=B0*AP*(Y(27)*Y(5)+Y(3)*Y(29)+Y(6)*Y(26)+Y(2)*
234

```

```

235      1Y(30))+B1*P*Y(25)-B2*Y(28)-B3*Y(27)-B4*Y(26)+B1*Y(1)
      DY(30)=(1.-E*X=OETA/ETA)*Y(29)/(S*(X**2))
      1-(1.-X4CETA/ETA)*Y(30)/X-ETA*Y(26)*Y(2)/(S*X)
236  70 RETURN
237      END

238      SUBROUTINE DMINV(A,N,D,L,M)
239      DIMENSION A(16),L(4),M(4)
240      DCUBLE PRECISICN A,D,BIGA,HCLD,CAES
241      D=1.0
242      AK=-N
243      DO 80 K=1,N
244      NK=NK+N
245      L(K)=K
246      M(K)=K
247      KK=NK+K
248      BIGA=A(KK)
249      DO 20 J=K,N
250      IZ=N*(J-1)
251      DO 20 I=K,N
252      IJ=IZ+I
253      10 IF(CAES(BIGA)-DAES(A(IJ))) 15,20,20
254      15 BIGA=A(IJ)
255      L(K)=I
256      M(K)=J
257      20 CCNTINUE
258      J=L(K)
259      IF(J-K) 35,35,25
260      25 KI=K-N
261      DO 30 I=1,N
262      KI=KI+N
263      HOLD=-A(KI)
264      JI=KI-K+J
265      A(KI)=A(JI)
266      30 A(JI)=HCLD
267      35 I=M(K)
268      IF(I-K) 45,45,38
269      38 JP=N*(I-1)
270      DO 40 J=1,N
271      JK=AK+J
272      JI=JP+J
273      HCLD=-A(JK)
274      A(JK)=A(JI)
275      40 A(JI)=HOLD
276      45 IF(BIGA) 43,46,48
277      46 D=0.0
278      RETURN
279      48 DO 55 I=1,N
280      IF(I-K) 50,55,50
281      50 IK=NK+I
282      A(IK)=A(IK)/(-BIGA)
283      55 CCNTINUE
284      DC 65 I=1,N
285      IK=NK+I
286      HOLD=A(IK)
287      IJ=I-N
288      DO 65 J=1,N
289      IJ=IJ+N
290      IF(I-K) 60,65,60
291      60 IF(J-K) 62,65,62

```

```

292      62 KJ=IJ-I+K
293      A(IJ)=HCLO*A(KJ)+A(IJ)
294      65 CCNTINUE
295      KJ=K-N
296      DO 75 J=1,N
297      KJ=KJ+N
298      IF(J-K) 70,75,70
299      70 A(KJ)=A(KJ)/BIGA
300      75 CCNTINUE
301      D=C*BIGA
302      A(KK)=1.0/BIGA
303      80 CCNTINUE
304      K=N
305      100 K=(K-1)
306      IF(K) 150,150,105
307      105 I=L(K)
308      IF(I-K) 120,120,108
309      108 JO=N*(K-1)
310      JR=N*(I-1)
311      DO 110 J=1,N
312      JK=JO+J
313      HOLD=A(JK)
314      JI=JR+J
315      A(JK)=-A(JI)
316      110 A(JI)=+CLO
317      120 J=P(K)
318      IF(J-K) 100,100,125
319      125 KI=K-N
320      DO 130 I=1,N
321      KI=KI+N
322      HCLO=A(KI)
323      JI=KI-K+J
324      A(KI)=-A(JI)
325      130 A(JI)=HCLO
326      GC TO 1CJ
327      150 RETURN
328      END

```

ACKNOWLEDGEMENT

The author wishes to express his appreciation and gratitude to his major professor, Dr. Chi-Lung Huang, for his continual guidance and support.

Thanks are also due to the other committee members: Professor Hugh S. Walker and Professor Dr. E. S. Lee.

The author extends his gratitude to the Mechanical Engineering Department for the financial aid provided.

FINITE-AMPLITUDE VIBRATION OF ORTHOTROPIC AXISYMMETRIC
VARIABLE THICKNESS ANNULAR PLATE

by

AURORA PREMKUMAR R.

B.E. (ME), University of Bombay (India), 1975

AN ABSTRACT OF A MASTER'S THESIS

submitted in partial fulfillment of the

requirements for the degree

MASTER OF SCIENCE

Department of Mechanical Engineering

KANSAS STATE UNIVERSITY
Manhattan, Kansas

1978

ABSTRACT

The problem of finite amplitude, axisymmetric free vibration of variable thickness orthotropic annular plates is formulated in terms of the Von Karman's dynamic equations. A Kantorovich averaging technique is applied to convert the nonlinear boundary value problem into a corresponding eigenvalue problem by elimination of the time variable. A numerical study is proposed by introducing the related initial value problem. By making successive corrections and perturbations of the parameters in a numerical solution to the initial value problem, approximate solutions to the boundary value problem are obtained. The cases investigated are free outside and fixed inside, parabolic and convex variable thickness orthotropic annular plates.

The hard spring behavior is evident, and it is found that the mode shape, bending stresses and membrane stresses are nonlinear functions of the amplitude of vibration.